



ShenZhen YiPinCheng Technology Co., LTD

Product Catalog

Add:Room B1,18th Floor, Building 12, Lehui Science and Technology Innovation Center, No. 489 Jihua Road, Bantian Street, Longgang District, Shenzhen,China

Contact Person Name(Sales manager): Emma Tan Tel:0755-28458835 Whatsapp/Wechat ID/Cell phone: 0086-18923430402

Email: sales@inskam.com Website: www.inskam.com

Please read the products you are interested in according to the page number:

Endoscope: Page1-64; Microscope: Page 65-83; Ear irrigation: Page 84-89; Ear camera:90-108

Dental cleaner and water flosser: Page 109-122; Blackhead remover : Page 123-126; Electric Spin Scrubber: Page 127-131;

Baby care: Page 132-138; Electric Nail Drill: Page 139-140; Other new models: Page 141-145

Endoscope

Rotation Endoscope

	5inches IPS-720degree-6mm	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S50		Pixel: 2MP Monitor: 5 inch IPS screen Image Resolution: 1920*1080(JPG) Video Recording: 1280*720(AVI) Depth of field: 2-10cm Camera waterproof: IP67 Probe diameter: 6mm Frame rate: 15-25FPS Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/3h Port:USB-C, TF Card slot(Support 64GB) Light: 4pcs LEDs Certification:CE/RoHS/ISO9001 Black case packaging Waterproof and oilproof Tungsten wire material 75 °C temperature protection	Four-ways 6mm	1m flexible cable/ Single lens	1300	31.5*29*11	10pcs/CTN; 59.5*33*59

	OTG-360degree -IOS+Android	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S43-OTG		Pixel: 2MP Image Resolution: 1920*1440(JPG) Video Recording: 1920*1440(AVI) Depth of field: 2-10cm Camera waterproof: IP67 Probe diameter: 8.5/5.5/3.9mm Frame rate: 15-25FPS Viewing Angle:70° Temperature:-10℃-50℃ Port:USB-C/Lightning Light: 8pcs LEDs Certification:CE/RoHS/ISO9001 APP: Sup-Anesok Support system: IOS10.0+/Android 6.0+	Two-ways 8.5mm	1m semi Single lens(box packing)	550	32.5*16.5*6	22pcs/CTN, 49*45.5*44
			Two-ways 8.5mm	1m semi Dual lens (box packing)	550	32.5*16.5*6	22pcs/CTN, 49*45.5*44
			Two-ways 8.5mm	1m semi Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*46*44
			Two-ways 8.5mm	2m semi Single lens	1278	42*30.5* 9.5	10pcs/CTN, 49*46*44
			Two-ways 8.5mm	3m semi Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*46*44
			Two-ways 8.5mm	1m semi Dual lens	/	42*30.5* 9.5	10pcs/CTN, 49*46*44
			Two-ways 8.5mm	2m semi Dual lens	1278	42*30.5* 9.5	10pcs/CTN, 49*46*44
			Two-ways 8.5mm	3m semi Dual lens	/	42*30.5* 9.5	10pcs/CTN, 49*46*44

	OTG-360degree -IOS+Android	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S43-OTG		Pixel: 2MP Image Resolution: 1920*1440(JPG) Video Recording: 1920*1440(AVI) Depth of field: 2-10cm Camera waterproof: IP67 Probe diameter: 8.5/5.5/3.9mm Frame rate: 15-25FPS Viewing Angle:70° Temperature:-10℃-50℃ Port:USB-C/Lightning Light: 8pcs LEDs Certification:CE/RoHS/ISO9001 APP: Sup-Anesok Support system: IOS10.0+/Android 6.0+	Two-ways 5.5mm	1m Soft Single lens(box packing)	/	42*30.5* 9.5	10pcs/CTN, 49*46*44
			Two-ways 5.5mm	2m Soft Single lens	1278	42*30.5* 9.5	10pcs/CTN, 49*46*44
			Two-ways 5.5mm	3m Soft Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*46*44

	OTG-360degree -Only Android	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S43-OTG		Pixel: 2MP Image Resolution: 1280*720(JPG) Video Recording: 1280*720(AVI) Depth of field: 2-10cm Camera waterproof: IP67 Probe diameter: 8.5/6/3.9mm Frame rate: 15-25FPS Viewing Angle:70° Temperature:-10℃-50℃ Port:USB-C Light: 8pcs LEDs Certification:CE/RoHS/ISO9001 APP: Inskam Support system: Android 6.0+	Two-ways 8.5mm	1m semi Single lens(box packing)	550	32.5*16.5*6	22pcs/CTN, 49*45.5*44
			Two-ways 8.5mm	1m semi Dual lens(box packing)	550	32.5*16.5*6	22pcs/CTN, 49*45.5*44
			Two-ways 8.5mm	2m semi Single lens	/	32.5*16.5*6	22pcs/CTN, 49*45.5*44
			Two-ways 6mm	1m semi Single lens(box	550	32.5*16.5*6	22pcs/CTN, 49*45.5*44
			Two-ways 6mm	2m semi Single lens	/	32.5*16.5*6	22pcs/CTN, 49*45.5*44
			Two-ways 6mm	1m semi Single lens (Black case)	/	32.5*16.5*6	22pcs/CTN, 49*45.5*44
			Two-ways 6mm	2m semi Single lens (Black case)	/	32.5*16.5*6	22pcs/CTN, 49*45.5*44
			Two-ways 3.9mm	1m Soft Single lens(box packing)	550	32.5*16.5*6	22pcs/CTN, 49*45.5*44

	4.3inch IPS-360degree	Specifications	Lens diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S43		Pixel: 2MP Monitor: 4.3 inch IPS screen Image Resolution: 1920*1080(JPG) Video Recording: 1280*720(AVI) Depth of field: 2-10cm Camera waterproof: IP67 Probe diameter: 8.5/6/3.9mm Frame rate: 15-25FPS Viewing Angle:70° Temperature:-10℃-50℃ Light: 8pcs LEDs Certification:CE/RoHS/ISO9001	Two-ways 8.5mm	1m semi Single lens	1260	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	2m semi Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	3m semi Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	1m semi Dual lens	1260	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	2m semi Dual lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 6mm	1m semi Single lens	1260	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 6mm	2m semi Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 3.9mm	1m semi single lens	1260	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 3.9mm	2m semi single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43

	4.3inch IPS-360degree	Specifications	Lens diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S20		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution:1280*720P Image Resolution: 1920*1080(JPG) Video Recording: 1280*720(AVI) Depth of field: 2-10cm Camera waterproof: IP67 Probe diameter: 8.5/3.9mm Frame rate: 15-25FPS Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/3h Port:USB-C, TF Card slot(Support 32GB) Light: 8pcs LEDs Color:Black Certification:CE/RoHS/ISO9001	Two-ways 6mm	1m semi rigid / Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	1m semi rigid / Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 6mm	1m semi rigid / Dual lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	1m semi rigid / Dual lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm Auto Focus	1m semi rigid / Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm Auto Focus	2m semi rigid / Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43

	OTG-360degree -IOS+Android	Specifications	Lens diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S20-OTG		Pixel: 2MP Image Resolution: 1920*1440(JPG) Video Recording: 1920*1440(AVI) Depth of field: 2-10cm Camera waterproof: IP67 Probe diameter: 8.5/6/3.9mm Frame rate: 15-25FPS Viewing Angle:70° Temperature:-10℃-50℃ Port:USB-C/Lightning Light: 8pcs LEDs Certification:CE/RoHS/ISO9001 APP: Sup-Anesok Support system: IOS10.0+/Android 6.0+	Two-ways 5.5mm	1m semi rigid / Single lens(yellow box)	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	1m semi rigid / Single lens(yellow box)	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	1m semi rigid/ Dual lens(yellow box)	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43

	5inch IPS-360degree	Specifications	Lens diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S10		Pixel: 2MP Monitor: 5 inch IPS screen Screen Resolution:1280*720P Image Resolution: 1920*1080(JPG) Video Recording: 1280*720(AVI) Depth of field: 2-10cm Camera waterproof: IP67 Probe diameter: 8.5/6/3.9mm Frame rate: 15-25FPS Viewing Angle:70° Temperature:-10℃ -50℃ Battery capacity: 2000mAh/3h Port:USB-C, TF Card slot(Support 32GB) Light: 8pcs LEDs Color:Black Certification:CE/RoHS/ISO9001	Two-ways 8.5mm	1m semi rigid / Single lens	1057	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	2m semi rigid / Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	1m semi rigid/ Dual lens	1057	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	1.5m semi rigid/ Dual lens	1340	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	2m semi rigid/ Dual lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 6mm	1m semi rigid / Single lens	1057	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 6mm	2m semi rigid/ Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 3.9mm	1m flexible / Single lens	1057	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 3.9mm	2m flexible / Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43

	5inch IPS-360degree	Specifications	Lens diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S30		Pixel: 2MP Monitor: 5 inch IPS screen Screen Resolution:1280*720P Image Resolution: 1920*1080(JPG) Video Recording: 1280*720(AVI) Depth of field: 2-10cm Camera waterproof: IP67 Probe diameter: 8.5/6/3.9mm Frame rate: 15-25FPS Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/3h Port:USB-C, TF Card slot(Support 32GB) Light: 8pcs LEDs Color:Black Certification:CE/RoHS/ISO9001	Two-ways 8.5mm	1m semi rigid / Single lens	1057	42*30.5* 9.5	10pcs/CTN, 49*44.5*43
			Two-ways 8.5mm	2m semi rigid / Single lens	/	42*30.5* 9.5	10pcs/CTN, 49*44.5*43

	5inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
G10 Pro		Pixel: 2MP Monitor: 5 inch IPS screen Screen Resolution: 1280*720P Image Resolution: 1920*1080(JPG) Video Recording: 1280*720(AVI) Depth of field:A:2-10cm;B:2-5cm; Frame rate: 15-25FPS Camera waterproof: IP67 Viewing Angle:65-85° Temperature:0°C-70°C Battery capacity: 2000mAh/3h Port:USB-C, TF Card slot(Support 64GB) Light: 8+1 Adjustable Led Lights Zoom: 1.0-1.5-2.0X Color:Black Certification:CE/RoHS Warranty: 1 Year 360degree rotation camera Detachable cable Dual screen at same time	8.5mm dual lens	Hard cable 1m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			8.5mm dual lens	Hard cable 2m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			8.5mm dual lens	Hard cable 3m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			8.5mm dual lens	Hard cable 5m	1321	31.5*29*11	10pcs/CTN; 59.5*33*59
			8.5mm dual lens	Hard cable 10m	1499	31.5*29*11	10pcs/CTN; 59.5*33*59

	4.3inches IPS-1080P-360degree camera	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
113B- Pro		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) (Front & Side Camera) Video Recording: 640*480(AVI) (Front & Side Camera) Depth of field:2-10cm Camera waterproof: IP67 Probe diameter: 8mm Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 32GB) Light: 8pcs LEDs Zoom:1.0-1.5-2.0X 360degree rotation camera Detachable cable Dual screen at same time	8.5mm dual lens	Hard 1m	415	18*15*6	30pcs/CTN; 45.5*38.5*38
			8.5mm dual lens	Hard 5m	602	18*15*6	30pcs/CTN; 45.5*38.5*38
			8.5mm dual lens	Hard 10m	/	18*15*6	30pcs/CTN; 45.5*38.5*38

Endoscope with Screen							
	5inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
G51		Pixel: 2MP Monitor: 5 inch IPS screen Screen Resolution: 1280*720P Image Resolution: 1920*1080(JPG) Video Recording: 1280*720(AVI) Depth of field:A:2-10cm;B:2-5cm Frame rate: 15-25FPS Camera waterproof: IP67 Viewing Angle:65-85° Temperature:0°C-70°C Battery capacity: 4400mAh/6h Port:USB-C, TF Card slot(Support 64GB) Light: 8+1 Adjustable Led Lights Zoom:1.0-1.5-2.0X Color:Orange+black/Green+black Certification:CE/RoHS Warranty: 1 Year	8mm dual lens	Snake tube 1m	1430	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm dual lens	Snake tube 3m	1789	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm dual lens	Hard cable 1m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm dual lens	Hard cable 3m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm dual lens	Hard cable 5m	2117	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm dual lens	Hard cable 10m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			5.5mm dual lens	Hard cable 1m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			5.5mm dual lens	Hard cable 5m	1445	31.5*29*11	10pcs/CTN; 59.5*33*59
			5.5mm dual lens	Hard cable 10m	/	31.5*29*11	10pcs/CTN; 59.5*33*59

	5inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
G51		Pixel: 2MP Monitor: 5 inch IPS screen Screen Resolution: 1280*720P Image Resolution: 1920*1080(JPG) Video Recording: 1280*720(AVI) Depth of field:A:2-10cm;B:2-5cm Frame rate: 15-25FPS Camera waterproof: IP67 Viewing Angle:65-85° Temperature:0℃-70℃ Battery capacity: 4400mAh/6h Port:USB-C, TF Card slot(Support 64GB) Light: 8+1 Adjustable Led Lights Zoom:1.0-1.5-2.0X Color:Orange+black/Green+black Certification:CE/RoHS Warranty: 1 Year	8mm Triple- lens	Snake tube 1m	1430	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm Triple- lens	Snake tube 3m	1789	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm Triple- lens	Hard cable 5m	2117	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm Triple- lens	Hard cable 10m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm Single-len	Hard cable 1m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm Single-len	Hard cable 10m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm Single-len	Snake tube 1m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			5.5mm Single-len	Hard cable 10m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			3.9mm Single-len	Hard cable 1m	/	31.5*29*11	10pcs/CTN; 59.5*33*59

	5inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
G10		Pixel: 2MP Monitor: 5 inch IPS screen Screen Resolution: 1280*720P Image Resolution: 1920*1080(JPG) Video Recording: 1280*720(AVI) Depth of field:A:2-10cm;B:2-5cm; Frame rate: 15-20FPS Camera waterproof: IP67 Viewing Angle:65-85° Temperature:0°C-70°C Battery capacity: 2000mAh/3h Port:USB-C, TF Card slot(Support 64GB) Light: 8+1 Adjustable Led Lights Zoom: 1.0-1.5-2.0X Color:Black Certification:CE/RoHS Warranty: 1 Year	5.5mm dual lens	Hard cable 5m	1346	31.5*29*11	10pcs/CTN; 59.5*33*59
			5.5mm dual lens	Hard cable 10m	1547	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm dual lens	Hard cable 1m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm dual lens	Hard cable 5m	1346	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm dual lens	Hard cable 10m	1547	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm dual lens	Hard cable 15m	/	/	/
			8mm single lens	Hard cable 1m	/	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm single lens	Hard cable 5m	1346	31.5*29*11	10pcs/CTN; 59.5*33*59
			8mm single lens	Hard cable 10m	1547	31.5*29*11	10pcs/CTN; 59.5*33*59

	5inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
5003B/ 5005M		Pixel:2MP Monitor: 5 inch IPS IPS screen Screen Resolution: 1280*720P Image Resolution: 1920*1080(JPG) Video Recording: 1280*720(AVI) Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/3h Port:USB-C, TF Card slot (Support 32GB) Light: 8pcs LEDs Zoom:1.0-1.5-2.0X Color: Black Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8mm	Hard cable 1m	458	18*14*6.5	27pcs/CTN; 57*42*24.5
			8mm	Hard cable 5m	574	18*14*6.5	27pcs/CTN; 57*42*24.5
			8mm	Hard cable 10m	753	19*14.5*7.3	24pcs/CTN; 57*42*24.5
			5.5mm	Hard cable 10m	753	19*14.5*7.3	24pcs/CTN; 57*42*24.5
			3.9mm	Hard cable 5m	574	18*14*6.5	27pcs/CTN; 57*42*24.5

	5inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
5003B-2/ 5005M-2		Pixel: 2MP Monitor: 5 inch IPS IPS screen Screen Resolution: 1280*720P Image Resolution: 1920*1080(JPG) (Front & Side Camera) Video Recording: 1280*720(AVI) (Front & Side Camera) Depth of field:2-10cm (Front & Side Camera) Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/3h Port:USB-C, TF Card slot (Support 32GB) Light: 8pcs LEDs Zoom:1.0-1.5-2.0X Color: Black Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8mm dual lens	Hard cable 1m	458	18*14*6.5	27pcs/CTN; 57*42*24.5
			8mm dual lens	Hard cable 5m	574	18*14*6.5	27pcs/CTN; 57*42*24.5
			8mm dual lens	Hard cable 10m	753	19*14.5*7.3	24pcs/CTN; 57*42*24.5
			5.5mm dual lens	Hard cable 5m	574	18*14*6.5	27pcs/CTN; 57*42*24.5
			5.5mm dual lens	Hard cable 10m	/	18*14*6.5	27pcs/CTN; 57*42*24.5
			8mm triple lens	Hard cable 1m	458	18*14*6.5	27pcs/CTN; 57*42*24.5
			8mm triple lens	Hard cable 5m	574	18*14*6.5	27pcs/CTN; 57*42*24.5
			8mm triple lens	Hard cable 10m	574	18*14*6.5	27pcs/CTN; 57*42*24.5

	4.5inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
451		Pixel: 2MP Monitor: 4.5 inch IPS screen Screen Resolution: 480*854P Image Resolution: 1920*1080(JPG) Video Recording: 1280*720(AVI) Depth of field:4-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/3h Port: USB-C, TF Card slot (Support 32GB) Light: 8pcs LEDs Color: Black/Gray/Blue Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8mm	Hard cable 1m	342	20*12.2*8	24pcs/CTN; 57*42*24.5
			8mm	Hard cable 5m	505	20*12.2*8	24pcs/CTN; 57*42*24.5
			8mm	Hard cable 10m	692	20*12.2*8	20pcs/CTN; 57*42*24.5
			5.5mm	Hard cable 1m	342	20*12.2*8	24pcs/CTN; 57*42*24.5
			5.5mm	Hard cable 5m	505	20*12.2*8	24pcs/CTN; 57*42*24.5
			5.5mm	Hard cable 10m	692	20*12.2*8	20pcs/CTN; 57*42*24.5
			3.9mm	Hard cable 1m	342	20*12.2*8	24pcs/CTN; 57*42*24.5

	4.5inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
451-2		Pixel: 2MP Monitor: 4.5 inch IPS screen Screen Resolution: 480*854P Image Resolution: 1920*1080(JPG) (Front & Side Camera) Video Recording: 1280*720(AVI) (Front & Side Camera) Depth of field:4-10cm (Front & Side Camera) Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/3h Port: USB-C, TF Card slot (Support 32GB) 8pcs LEDs Usage time: 3hours Color: Black/Gray/Blue Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8mm dual lens	Hard cable 1m	342	20*12.2*8	24pcs/CTN; 57*42*24.5
			8mm dual lens	Hard cable 5m	505	20*12.2*8	24pcs/CTN; 57*42*24.5
			8mm dual lens	Hard cable 10m	692	20*12.2*8	20pcs/CTN; 57*42*24.5

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
112B-1		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) Video Recording: 640*480(AVI) Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 64GB) Light: 8pcs LEDs Zoom:1.0-1.5-2.0X Color:Orange+black Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8mm	Snake tube 1m	1390	31.5*29*11	10pcs/CTN; 59*32*58
			8mm	Hard cable 1m	1216	31.5*29*11	10pcs/CTN; 59*32*58
			8mm	Hard cable 3m	/	31.5*29*11	10pcs/CTN; 59*32*58
			8mm	Hard cable 5m	1415	31.5*29*11	10pcs/CTN; 59*32*58
			8mm	Hard cable 10m	1873	31.5*29*11	10pcs/CTN; 59*32*58

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
112B-1		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) Video Recording: 640*480(AVI) Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 64GB) Light: 8pcs LEDs Zoom:1.0-1.5-2.0X Color:Orange/Gray Certification:CE/RoHS/ISO9001 Warranty: 1 Year	5.5mm	Hard cable 1m	1216	31.5*29*11	10pcs/CTN; 59*32*58
			5.5mm	Hard cable 3m	/	31.5*29*11	10pcs/CTN; 59*32*58
			5.5mm	Hard cable 5m	1415	31.5*29*11	10pcs/CTN; 59*32*58
			5.5mm	Hard cable 10m	1873	31.5*29*11	10pcs/CTN; 59*32*58
			3.9mm	Hard cable 1m	1216	31.5*29*11	10pcs/CTN; 59*32*58
			5.5mm	Snake tube 1m	1415	31.5*29*11	10pcs/CTN; 59*32*58

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
112B-2		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) (Front & Side Camera) Video Recording: 640*480(AVI) (Front & Side Camera) Depth of field:2-10cm (Front & Side Camera) Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 64GB) Light: 8pcs LEDs Zoom:1.0-1.5-2.0X Color:Orange/Gray Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8mm dual lens	Hard cable 1m	1216	31.5*29*11	10pcs/CTN; 59*32*58
			8mm dual lens	Hard cable 5m	1415	31.5*29*11	10pcs/CTN; 59*32*58
			8mm dual lens	Hard cable 10m	1873	31.5*29*11	10pcs/CTN; 59*32*58
			8mm dual lens	Snake tube 1m	1390	31.5*29*11	10pcs/CTN; 59*32*58
			5.5mm dual lens	Hard cable 1m	1216	31.5*29*11	10pcs/CTN; 59*32*58
			5.5mm dual lens	Hard cable 5m	1415	31.5*29*11	10pcs/CTN; 59*32*58
			5.5mm dual lens	Hard cable 10m	1873	31.5*29*11	10pcs/CTN; 59*32*58

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
113B-1		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) Video Recording: 640*480(AVI) Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 32GB) Light: 8pcs LEDs Zoom:1.0-1.5-2.0X Color: Orange/Gray	8mm	Hard 1m	415	18*15*6	30pcs/CTN; 45.5*38.5*38
			8mm	Hard 3m	/	18*15*6	30pcs/CTN; 45.5*38.5*38
			8mm	Hard 5m	602	18*15*6	30pcs/CTN; 45.5*38.5*38
			8mm	Hard 10m	697	18*15*6	30pcs/CTN; 45.5*38.5*38
			5.5mm	Hard 1m	415	18*15*6	30pcs/CTN; 45.5*38.5*38
			5.5mm	Hard 5m	602	18*15*6	30pcs/CTN; 45.5*38.5*38
			5.5mm	Hard 10m	697	18*15*6	30pcs/CTN; 45.5*38.5*38

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
113B-2		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) (Front & Side Camera) Video Recording: 640*480(AVI) (Front & Side Camera) Depth of field:2-10cm Camera waterproof: IP67 Probe diameter: 8mm Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 32GB) Light: 8pcs LEDs Zoom:1.0-1.5-2.0X	8mm dual lens	Hard 1m	415	18*15*6	30pcs/CTN; 45.5*38.5*38
			8mm dual lens	Hard 5m	602	18*15*6	30pcs/CTN; 45.5*38.5*38
			8mm dual lens	Hard 10m	697	18*15*6	30pcs/CTN; 45.5*38.5*38
			5.5mm dual lens	Hard 1m	415	18*15*6	30pcs/CTN; 45.5*38.5*38
			5.5mm dual lens	Hard 5m	602	18*15*6	30pcs/CTN; 45.5*38.5*38
			8mm triple lens	Hard 1m	415	18*15*6	30pcs/CTN; 45.5*38.5*38
			8mm triple lens	Hard 5m	415	18*15*6	30pcs/CTN; 45.5*38.5*38
			8mm triple lens	Hard 10m	697	18*15*6	30pcs/CTN; 45.5*38.5*38

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
C40		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) (Front & Side Camera) Video Recording: 640*480(AVI) (Front & Side Camera) Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 32GB) Light: 8pcs LEDs	8.5mm single lens	Hard cable 1m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm single lens	Hard cable 5m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm single lens	Hard cable 10m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			6mm Single lens	Hard cable 5m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			6mm dual lens	Hard cable 5m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm dual lens	Hard cable 1m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm dual lens	Hard cable 5m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm dual lens	Hard cable 10m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
G43	  4.3-inch Screen  1080P Resolution  2000mAh Battery  Single Lens  8 LED Lights  IP67 Waterproof	Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) (Front & Side Camera) Video Recording: 640*480(AVI) (Front & Side Camera) Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 32GB) Light: 8pcs LEDs	8.5mm single lens	Hard cable 1m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm single lens	Hard cable 5m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm single lens	Hard cable 10m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			6mm Single lens	Hard cable 5m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			6mm dual lens	Hard cable 5m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm dual lens	Hard cable 1m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm dual lens	Hard cable 5m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm dual lens	Hard cable 10m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8mm single lens Auto focus	Hard cable 5m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
G40		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) (Front & Side Camera) Video Recording: 640*480(AVI) (Front & Side Camera) Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 32GB) Light: 8pcs LEDs	8.5mm	Hard cable 1m	340	28*14.5*7.5	36pcs/CTN; 60*52*48
			8.5mm	Hard cable 5m	630	28*14.5*7.5	15pcs/CTN; 44*40*32
			8.5mm	Hard cable 10m	832	28*14.5*7.5	36pcs/CTN; 60*52*48
			8.5mm	Hard cable 15m	1052	28*19.5*9.8	13pcs/CTN; 50*40*40

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
C30		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) (Front & Side Camera) Video Recording: 640*480(AVI) (Front & Side Camera) Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 32GB) Light: 8pcs LEDs	8.5mm	Hard cable 5m	547	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Dual lens Hard cable 5m	547	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5

	4.3inches IPS-1080P-Auto focus-2MP	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
<u>C30-A</u>		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) (Front & Side Camera) Video Recording: 640*480(AVI) (Front & Side Camera) Depth of field: 3-500cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 32GB) Light: 8pcs LEDs	8.5mm	Hard cable 1m	248	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard cable 5m	547	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard cable 10m	/	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5

	4.3inches IPS-1080P-Auto focus-2MP	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
<u>G30-A</u>		Pixel: 2MP Monitor: 4.3 inch IPS screen Screen Resolution: 480*272P Image Resolution: 1920*1080(JPG) (Front & Side Camera) Video Recording: 640*480(AVI) (Front & Side Camera) Depth of field: 3-500cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Port:Micro USB, TF Card slot (Support 32GB) Light: 8pcs LEDs	8.5mm	Hard cable 1m	340	28*14.5*7.5	36pcs/CTN; 58*51*46
			8.5mm	Hard cable 5m	630	28*14.5*7.5	36pcs/CTN; 58*51*46
			8.5mm	Hard cable 10m	832	28*14.5*8	21pcs/CTN; 61.5*46.5*30

Enodsocpe camera cannot take photo and record video

	4.3inches LCD-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
C20-M		Pixel: 2MP Monitor: 4.3-inch color IPS display Screen Resolution: 480*272P Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity: 2000mAh/4h Light: 8 adjustable brightness LEDs Charge port: Type-C Line length: 1/5/10/15/20/30m Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8.5mm	Hard cable 1m	220	19.5*12.7*8	30pcs/CTN; 45.5*45.5*34.5
			8.5mm	Hard cable 5m	447	19.5*12.7*8	30pcs/CTN; 45.5*45.5*34.5
			8.5mm	Hard cable 10m	690	19.5*12.7*8	30pcs/CTN; 45.5*45.5*34.5
			8.5mm	Hard cable 15m	900	/	/
			8.5mm	Hard cable 20m	1050	/	/
			8.5mm	Hard cable 30m	1450	/	/

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
C30-M		Pixel: 2MP Monitor: 4.3-inch color IPS display Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity:2000mAh/3.5h Light: 8 adjustable brightness LEDs Charge port: Type-C Line length: 1/5/10/15/20/30m Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8.5mm	Hard cable 1m	248	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard cable 5m	547	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard cable 10m	740	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard cable 15m	950	28*19.5*9.8	20pcs/CTN; 60*52*48
			8.5mm	Hard cable 20m	1100	28*19.5*9.8	20pcs/CTN; 60*52*48
			8.5mm	Hard cable 30m	1500	28*19.5*9.8	20pcs/CTN; 60*52*48
			8.5mm	Hard Dual lens 1m	248	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard Dual lens 5m	547	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard Dual lens 10m	740	19.5*12.7*8	36pcs/CTN; 50*40.5*40.5

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
<u>G30-M</u>		Pixel: 2MP Monitor: 4.3-inch color IPS display Depth of field: 2-10cm Camera waterproof: IP67 Viewing Angle: 70° Temperature: -10℃ -50℃ Battery capacity: 2000mAh/3.5h Light: 8 adjustable brightness LEDs Charge port: Type-C Line length: 1/5/10/15/20/30m Certification: CE/RoHS/ISO9001 Warranty: 1 Year	8.5mm	Hard cable 1m	340	28*14.5*7.5	36pcs/CTN; 58*51*46
			8.5mm	Hard cable 5m	630	28*14.5*7.5	36pcs/CTN; 58*51*46
			8.5mm	Hard cable 10m	832	28*14.5*8	21pcs/CTN; 61.5*46.5*30
			8.5mm	Hard cable 15m	1052	28*19.5*9.8	20pcs/CTN; 60*52*48
			8.5mm	Hard cable 20m	1200	28*19.5*9.8	20pcs/CTN; 60*52*48
			8.5mm	Hard cable 30m	1600	28*19.5*9.8	20pcs/CTN; 60*52*48
			8.5mm	Hard cable 50m	/	/	/

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
<u>G40-M</u>		Pixel: 2MP Monitor: 4.3-inch color IPS display Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity:2000mAh/3.5h Light: 8 adjustable brightness LEDs Charge port: Type-C Line length: 1/5/10/15/20/30m Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8.5mm	Hard cable 1m	340	28*14.5*7.5	36pcs/CTN; 60*52*48
			8.5mm	Hard cable 5m	630	28*14.5*7.5	15pcs/CTN; 44*40*32
			8.5mm	Hard cable 10m	832	28*14.5*7.5	36pcs/CTN; 60*52*48
			8.5mm	Hard cable 15m	1052	28*19.5*9.8	13pcs/CTN; 50*40*40
			8.5mm	Hard cable 20m	1200	28*19.5*9.8	20pcs/CTN; 60*52*48
			8.5mm	Hard cable 30m	1600	28*19.5*9.8	20pcs/CTN; 60*52*48

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
C43-M		Pixel: 2MP Monitor: 4.3-inch color IPS display Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity:2000mAh/3.5h Light: 8 adjustable brightness LEDs Charge port: Type-C Line length: 1/5/10m Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8.5mm	Hard cable 1m	360	20*13.5*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard cable 5m	510	20*13.5*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard cable 10m	750	20*13.5*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard cable Dual lens 1m	360	20*13.5*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard cable Dual lens 5m	510	20*13.5*8	36pcs/CTN; 50*40.5*40.5
			8.5mm	Hard cable Dual lens 10m	750	20*13.5*8	36pcs/CTN; 50*40.5*40.5

	4.3inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
<u>G60-M</u>		Pixel: 2MP Monitor: 4.3-inch color IPS display Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity:2000mAh/3.5h Light: 8 adjustable brightness LEDs Charge port: Type-C Line length: 1/5/10/15/20/30m Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8.5mm	Hard cable 1m	318	28*14.5*7.5	22pcs/CTN; 59.5*59*33
			8.5mm	Hard cable 5m	608	28*14.5*7.5	22pcs/CTN; 59.5*59*33
			8.5mm	Hard cable 10m	810	28*14.5*7.5	22pcs/CTN; 59.5*59*33
			8.5mm	Hard cable 15m	1030	28*19.5*9.8	20pcs/CTN; 59.5*59*33
			8.5mm	Hard cable 20m	1178	28*19.5*9.8	20pcs/CTN; 59.5*59*33
			8.5mm	Hard cable 30m	1578	28*19.5*9.8	20pcs/CTN; 59.5*59*33

	2.4inches IPS-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
<u>G20-M</u>		Pixel: 2MP Monitor: 2.4-inch color IPS display Depth of field:2-10cm Camera waterproof: IP67 Viewing Angle:70° Temperature:-10℃-50℃ Battery capacity:2000mAh/5h Light: 8 adjustable brightness LEDs Charge port: Type-C Line length: 1/5/10/15/20/30m Certification:CE/RoHS/ISO9001 Warranty: 1 Year	8.5mm single lens	Hard cable 1m	302	/	24pcs/CTN; 45*40*45
			8.5mm single lens	Hard cable 5m	450	/	24pcs/CTN; 45*40*45
			8.5mm single lens	Hard cable 10m	650	/	24pcs/CTN; 45*40*45
			8.5mm dual lens	Hard cable 1m	302	/	24pcs/CTN; 45*40*45
			8.5mm dual lens	Hard cable 5m	450	/	24pcs/CTN; 45*40*45
			8.5mm dual lens	Hard cable 10m	650	/	24pcs/CTN; 45*40*45

Micro-USB Endoscope							
	Micro-USB/USB-480P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
AN97		Image resolution: 640*480 Video resolution: 640*480 Waterproof rating: IP67 Lights: 6 adjustable white LEDs Focal length: 4-10cm USB interface: Micro USB/USB Power supply: 5V DC Sensor size: 1/9 inch Frame rate: 30FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Support system: Android/Windows 2000/XP/Vista/Windows 7/8/10 Mac OS Certification:CE/RoHS/ISO9001 APP: Inskam	5.5mm	1m	84	13*13*4	100pcs/CTN; 50*40*40
			5.5mm	1.5m	92	13*13*4	100pcs/CTN; 50*40*40
			5.5mm	2m	108	13*13*4	100pcs/CTN; 50*40*40
			5.5mm	3.5m	127	13*13*4	100pcs/CTN; 50*40*40
			5.5mm	5m	187	13*13*4	100pcs/CTN; 50*40*40
			7mm	1m	84	13*13*4	100pcs/CTN; 50*40*40
			7mm	1.5m	92	13*13*4	100pcs/CTN; 50*40*40
			7mm	2m	108	13*13*4	100pcs/CTN; 50*40*40
			7mm	3.5m	127	13*13*4	100pcs/CTN; 50*40*40
			7mm	5m	187	13*13*4	100pcs/CTN; 50*40*40

2 IN 1 (Micro-USB&USB) Endoscope							
AN99	Micro-USB/USB-480P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
		Image resolution: 640*480 Video resolution: 640*480 Waterproof rating: IP67 Lights: 6 adjustable white LEDs Focal length: 4-10cm USB interface: Micro USB/USB Power supply: 5V DC Sensor size: 1/9 inch Frame rate: 30FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Support system: Android/Windows 2000/XP/Vista/Windows 7/8/10 Mac OSVISTA Certification:CE/RoHS/ISO9001 APP: Inskam	5.5mm	2m	58	13*13*4	300pcs/CTN; 50*40*40
			5.5mm	5m	118	19.5*7.5* 4.5	120pcs/CTN; 50*40*40
			5.5mm	10m	202	19.5*7.5* 4.5	120pcs/CTN; 50*40*40
			7mm	2m	58	13*13*4	300pcs/CTN; 50*40*40
			7mm	5m	118	19.5*7.5* 4.5	120pcs/CTN; 50*40*40
			7mm	10m	202	19.5*7.5* 4.5	120pcs/CTN; 50*40*40

	Micro-USB/USB-720P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
AN99		Image resolution: 1280*720 Video resolution: 640*480 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Focal length: 4-10cm USB interface: Micro USB/USB Power supply: 5V DC Sensor size: 1/6 inch Frame rate: 30FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Support system: Android/Windows 2000/XP/Vista/Windows 7/8/10 Mac OS Certification:CE/RoHS/ISO9001 APP: Inskam	8mm	2m	58	13*13*4	300pcs/CTN; 50*40*40
			8mm	5m	118	19.5*7.5* 4.5	120pcs/CTN; 50*40*40
			8mm	10m	202	19.5*7.5* 4.5	120pcs/CTN; 50*40*40

3 IN 1 (Micro USB&USB&USB-C) Gun Endoscope

G101	Micro USB&USB&USB-C-720P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
		Camera outer diameter: 5.0mm Image resolution: 1920*1080P Video resolution: 640*480 Waterproof rating: IP67 Lights: 6 adjustable white LEDs Cable length: 2.5m Focal length: 0.5-3cm USB interface: Micro USB/USB/USB-C Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Support system: Android/Windows 2000/XP/Vista/Windows 7/8/10 Mac OS Certification:CE/RoHS/ISO9001 APP: Inskam	5.0mm	2.5m snake tube	/	/	/

3 IN 1 (Micro USB&USB&USB-C) Endoscope							
Inskam 107	Micro USB&USB&USB-C-720P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
		Camera outer diameter: 3.9mm Image resolution: 1280*720 Video resolution: 640*480 Waterproof rating: IP67 Lights: 6 adjustable white LEDs Cable length: 1m/3.5m/5m/10m Focal length: 4-10cm USB interface: Micro USB/USB/USB-C Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Support system: Android/Windows 2000/XP/Vista/Windows 7/8/10 Mac OS Certification:CE/RoHS/ISO9001 APP: Inskam	3.9mm	1m	90	13*12.5* 3.5	100pcs/CTN; 50*40*40
			3.9mm	3.5m	155	13*12.5* 3.5	100pcs/CTN; 50*40*40
			3.9mm	5m	194	13*12.5* 3.5	100pcs/CTN; 50*40*40
			3.9mm	10m	378	13*12.5* 3.5	100pcs/CTN; 50*40*40

	Micro USB&USB&USB-C-480P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Y102		Image resolution: 640*480 Video resolution: 640*480 Waterproof rating: IP67 Lights: 6 adjustable white LEDs Focal length: 4-10cm USB interface: Micro USB/USB/USB-C Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Support system: Android/Windows 2000/XP/Vista/Windows 7/8/10 Mac OS Certification:CE/RoHS/ISO9001 APP: Inskam	5.5mm	1m	71	12*12*3.5	100pcs/CTN; 50*40*40
			5.5mm	1.5m	87	12*12*3.5	100pcs/CTN; 50*40*40
			5.5mm	2m	100	12*12*3.5	100pcs/CTN; 50*40*40
			5.5mm	3.5m	118	12*12*3.5	100pcs/CTN; 50*40*40
			5.5mm	5m	131	12*12*3.5	100pcs/CTN; 50*40*40
			7mm	1m	71	12*12*3.5	100pcs/CTN; 50*40*40
			7mm	1.5m	87	12*12*3.5	100pcs/CTN; 50*40*40
			7mm	2m	100	12*12*3.5	100pcs/CTN; 50*40*40
			7mm	3.5m	118	12*12*3.5	100pcs/CTN; 50*40*40
			7mm	5m	131	12*12*3.5	100pcs/CTN; 50*40*40

	Micro USB&USB&USB-C-720P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Y102		Camera outer diameter: 8mm Image resolution: 1280*720 Video resolution: 640*480 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Focal length: 4-10cm USB interface: Micro USB/USB/USB-C Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Support system: Android/Windows 2000/XP/Vista/Windows 7/8/10 Mac OS Certification:CE/RoHS/ISO9001 APP: Inskam	8mm	1m	71	12*12*3.5	100pcs/CTN; 50*40*40
			8mm	1.5m	87	12*12*3.5	100pcs/CTN; 50*40*40
			8mm	2m	100	12*12*3.5	100pcs/CTN; 50*40*40
			8mm	3.5m	118	12*12*3.5	100pcs/CTN; 50*40*40
			8mm	5m	131	12*12*3.5	100pcs/CTN; 50*40*40

	Micro USB&USB&USB-C-1200P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Y101		Image resolution: 1600*1200 Video resolution: 640*480 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Focal length: 4-10cm USB interface: MicroUSB/USB/USB-C Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Support system: Android/Windows 2000/XP/Vista/Windows 7/8/10 Mac OS Certification:CE/RoHS/ISO9001	8mm	1m	71	12*12*3.5	100pcs/CTN; 50*40*40
			8mm	2m	100	12*12*3.5	100pcs/CTN; 50*40*40
			8mm	3.5m	118	12*12*3.5	100pcs/CTN; 50*40*40
			8mm	5m	131	12*12*3.5	100pcs/CTN; 50*40*40
			8mm	10m	346	14*13*5	50pcs/CTN; 50*40*40
	Micro USB&USB&USB-C-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Y101		Front camera: Image resolution: 1920*1080p Video resolution: 640*480p Side camera: Image resolution: 640*480p Video resolution: 640*480p Focal length: 4-10cm	8mm dual lens	1m	71	12*12*3.5	100pcs/CTN; 50*40*40
			8mm dual lens	3m	110	12*12*3.5	100pcs/CTN; 50*40*40
			8mm dual lens	5m	131	12*12*3.5	100pcs/CTN; 50*40*40
			8mm dual lens	10m	346	14*13*5	50pcs/CTN; 50*40*40

Auto Focus Endoscope							
	Micro USB&USB&USB-C- 2MP-Auto focus	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 103A	 Auto Focus Direct connection HD pixels IP67 waterproof	Camera outer diameter: 8mm Auto focus Image resolution: 1920*1080,1280*720,640*480 Video resolution: 640*480 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Focal length: 3cm-∞ USB interface: Micro USB/USB/USB-C Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Support system: Android/Windows 2000/XP/Vista/Windows 7/8/10 Mac OS Certification:CE/RoHS/ISO9001 APP: Inskam	8mm	1m	/	12*12* 3.7	78pcs/CTN; 52*27*40
			8mm	5m	/	12*12* 3.7	78pcs/CTN; 52*27*40
			8mm	10m	/	/	/

	Micro USB&USB&USB-C-5MP-Auto focus	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 103A		Camera outer diameter: 8mm Auto focus Image resolution: 2592*1944, 1920*1080, 1280*720, 640*480 Video resolution: 640*480 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Focal length: 3cm-∞ USB interface: Micro USB/USB/USB-C Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Support system: Android/Windows 2000/XP/Vista/Windows 7/8/10 Mac OS Certification: CE/RoHS/ISO9001 APP: Inskam	8mm	Single lens 1m	/	12*12* 3.7	78pcs/CTN; 52*27*40
			8mm	Single lens 5m	/	12*12* 3.7	78pcs/CTN; 52*27*40
			8mm	Single lens 10m	/	/	/
			8mm	Dual lens 1m	/	12*12* 3.7	78pcs/CTN; 52*27*40
			8mm	Dual lens 5m	/	12*12* 3.7	78pcs/CTN; 52*27*40
			8mm	Dual lens 10m	/	/	/
			8mm	Dual lens 10m	/	/	/

	Micro USB&USB&USB-C-5MP-Auto focus	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 108A		Camera outer diameter: 11.2mm Auto focus Image resolution: 2592*1944, 1920*1080,1280*720,640*480 Video resolution: 640*480 Waterproof rating: IP67 Lights: 4 adjustable white LEDs Focal length: 3cm-∞ USB interface: Micro USB/USB/USB-C Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Support system: Android/Windows 2000/XP/Vista/Windows 7/8/10 Mac OS Certification:CE/RoHS/ISO9001 APP: Inskam	11.2mm	1m	235	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			11.2mm	2m	250	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			11.2mm	3.5m	293	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			11.2mm	5m	351	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			11.2mm	10m	543	15.4*13.4*7.2	32pcs/CTN; 50*40*40

Lightning Endoscope for Iphone

	Lightning-1440P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W400-E (A)		Camera outer diameter: 7.9mm Image resolution: 1920*1440 Video resolution: 1920*1440 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Focal length: 2-10cm Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Certification:CE/RoHS/FCC APP: SUP-ANESOK Support system: IOS10.0+	5.5mm	Single lens 5m Lightning	177	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm	Single lens 1m Lightning	120	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm	Single lens 5m Lightning	177	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm	Single lens 10m Lightning	340	12*12* 5.2	/
			7.9mm	Dual lens 1m Lightning	120	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm	Dual lens 5m Lightning	177	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm	Dual lens 10m Lightning	340	12*12* 5.2	/

	USB-C to Lightning-1440P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W400-E (B)		Camera outer diameter: 7.9mm Image resolution: 1920*1440 Video resolution: 1920*1440 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Focal length: 2-10cm Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Certification:CE/RoHS/FCC APP: SUP-ANESOK Support system: IOS10.0+/Android6.0+	7.9mm	Single lens 1m Lightning	120	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm	Single lens 5m Lightning	177	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm	Dual lens 5m Lightning	177	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm	Single lens 10m Lightning	340	12*12* 5.2	/

	USB-C to Lightning-1440P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W400-D	 	Camera outer diameter: 7.9mm Image resolution: 1920*1440 Video resolution: 1920*1440 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Focal length: 2-10cm Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Certification:CE/RoHS/FCC APP: Ueeplus Support system: IOS10.0+/Android6.0+	7.9mm Single lens	1m Lightning	90	13.5*12.7*3.5	72pcs/CTN; 51*38*26.5
			7.9mm Single lens	5m Lightning	202	13.5*12.7*3.5	72pcs/CTN; 51*38*26.5
			7.9mm Single lens	10m Lightning	310	135*127*60	40pcs/CTN; 51*38*26.5
			7.9mm Dual lens	1m Lightning	90	13.5*12.7*3.5	72pcs/CTN; 51*38*26.5
			7.9mm Dual lens	5m Lightning	202	13.5*12.7*3.5	72pcs/CTN; 51*38*26.5
			7.9mm Dual lens	10m Lightning	310	135*127*60	40pcs/CTN; 51*38*26.5
			5.5mm Single lens	1m Lightning	90	13.5*12.7*3.5	72pcs/CTN; 51*38*26.5
			5.5mm Single lens	5m Lightning	202	13.5*12.7*3.5	72pcs/CTN; 51*38*26.5
			5.5mm Single lens	10m Lightning	310	135*127*60	40pcs/CTN; 51*38*26.5
			5.5mm Dual lens	1m Lightning	90	13.5*12.7*3.5	72pcs/CTN; 51*38*26.5
			5.5mm Dual lens	5m Lightning	202	13.5*12.7*3.5	72pcs/CTN; 51*38*26.5
			5.5mm Dual lens	10m Lightning	310	135*127*60	40pcs/CTN; 51*38*26.5

	USB-C and Lightning-1440P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W400-C		Camera outer diameter: 7.9mm Image resolution: 1920*1440 Video resolution: 1920*1440 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Focal length: 2-10cm Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Certification:CE/RoHS/FCC APP: SUP-ANESOK Support system: IOS10.0+/Android6.0+	7.9mm	Single lens 1m Lightning	120	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm	Single lens 5m Lightning	177	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm	dual lens 5m Lightning	177	12*12* 3.7	78pcs/CTN; 52*27*40

	WIFI Endoscope						
	WIFI-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W300A		Camera outer diameter: 7.9mm Image resolution: 1920*1080 Video resolution: 1920*1080 Waterproof rating: IP67 Lights: 6 adjustable white LEDs Focal length: 2-10cm Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Transmission Distance: 5m Certification:CE/RoHS/FCC APP: ANESOK Support system: Android6.0+/IOS10.0+	7.9mm Single lens	1m USB-C	120	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Single lens	3m USB-C	164	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Dual lens	1m USB-C	120	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Dual lens	3m USB-C	164	12*12* 3.7	78pcs/CTN; 52*27*40

	WIFI-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W300-B		Camera outer diameter: 7.9mm Image resolution: 1920*1080 Video resolution: 1920*1080 Waterproof rating: IP67 Lights: 6 adjustable white LEDs Focal length: 2-10cm Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Transmission Distance: 5m Certification:CE/RoHS/FCC APP: ANESOK Support system: Android6.0+/IOS10.0+	7.9mm Single lens	1m USB-C- Lightning/US B-C-Micro	120	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Single lens	3m USB-C- Lightning/US B-C-Micro	164	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Dual lens	1m USB-C- Lightning/US B-C-Micro	120	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Dual lens	3m USB-C- Lightning/US B-C-Micro	164	12*12* 3.7	78pcs/CTN; 52*27*40

	WIFI-1080P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W300-C		Camera outer diameter: 7.9mm Image resolution: 1920*1080 Video resolution: 1920*1080 Waterproof rating: IP67 Lights: 6 adjustable white LEDs Focal length: 2-10cm Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Transmission Distance: 5m Certification:CE/RoHS/FCC APP: ANESOK Support system: Android6.0+/IOS10.0+	7.9mm Single lens	1m USB-C and Lightning and Micro	113	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Single lens	3m USB-C and Lightning and Micro	157	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Dual lens	1m USB-C and Lightning and Micro	113	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Dual lens	3m USB-C and Lightning and Micro	157	12*12* 3.7	78pcs/CTN; 52*27*40

	WIFI-720P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W300 Pro		Camera outer diameter: 7.9mm Image resolution: 1280*720 Video resolution: 1280*720 Waterproof rating: IP67 Lights: 6 adjustable white LEDs Focal length: 2-10cm Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Photo format: JPEG Video format: MP4/AVI Transmission Distance: 5m Battery capacity: 550mAh Usage time: 2.4h Certification:CE/RoHS/FCC APP: ANESOK Support system: Android6.0+/IOS10.0+	7.9mm Single lens	1m USB-C and Lightning and Micro	/	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Single lens	3m USB-C and Lightning and Micro	/	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Dual lens	1m USB-C and Lightning and Micro	/	12*12* 3.7	78pcs/CTN; 52*27*40
			7.9mm Dual lens	3m USB-C and Lightning and Micro	/	12*12* 3.7	78pcs/CTN; 52*27*40

	WIFI-720P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
YPC 99		Camera outer diameter: 8mm Image resolution: 1280*720 Video resolution: 640*480 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Cable length: 1m/2m/3.5m/5m Focal length: 4-10cm Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Battery capacity: 500mAh Usage time: 1h Photo format: JPEG Video format: MP4/AVI Support system: ios/android/windows/mac Transmission Distance: 5m Certification:CE/RoHS/FCC/ISO9001 APP: Inskam	8mm	1m	125	12.5*2.7* 21	96pcs/CTN; 50*40*40
			8mm	2m	140	12.5*2.7* 21	96pcs/CTN; 50*40*40
			8mm	3.5m	183	12.5*2.7* 21	96pcs/CTN; 50*40*40
			8mm	5m	214	11.5*13* 5.7	72pcs/CTN; 50*40*40

	WIFI-720P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
YPC 100		Camera outer diameter: 8mm Image resolution: 1280*720 Video resolution: 640*480 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Cable length: 1m/2m/3m/5m/7m/10m Focal length: 4-10cm Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Battery capacity: 500mAh/1h Photo format: JPEG Video format: MP4/AVI Support system: ios/android/windows/mac Transmission Distance: 5m Certification:CE/RoHS/FCC/ISO9001 APP: Inskam	8mm	1m	155	11.5*13* 5.7	72pcs/CTN; 50*40*40
			8mm	2m	170	11.5*13* 5.7	72pcs/CTN; 50*40*40
			8mm	3m	229	11.5*13* 5.7	72pcs/CTN; 50*40*40
			8mm	5m	286	11.5*13* 5.7	72pcs/CTN; 50*40*40
			8mm	7m	343	14.5*13* 7.2	45pcs/CTN; 50*40*40
			8mm	10m	440	14.5*13* 7.2	45pcs/CTN; 50*40*40

	WIFI -1200P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
110A		Camera outer diameter: 8mm Image resolution: 1600*1200 Video resolution: 640*480 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Cable length: 1m/1.5m/2m/3.5m/5m/10m Focal length: 4-10cm Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Battery capacity: 550mAh/1h Photo format: JPEG Video format: MP4/AVI Support system: ios/android/windows/mac Transmission Distance: 5m Certification:CE/RoHS/FCC/ISO9001 APP: Inskam	8mm	1m	192	11.5*13* 5.7	72pcs/CTN; 50*40*40
			8mm	1.5m	200	11.5*13* 5.7	72pcs/CTN; 50*40*40
			8mm	2m	207	11.5*13* 5.7	72pcs/CTN; 50*40*40
			8mm	3.5m	229	11.5*13* 5.7	72pcs/CTN; 50*40*40
			8mm	5m	286	14.5*13* 7.2	45pcs/CTN; 50*40*40
			8mm	10m	440	14.5*13* 7.2	45pcs/CTN; 50*40*40

	WIFI-720P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 130-5		Camera outer diameter: 5.5mm Image resolution: 1280*720 Video resolution: 640*480 Waterproof rating: IP67 Lights: 6 adjustable white LEDs Cable length: 1m/3.5m/5m/10m Focal length: 4-10cm Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Battery capacity: 1000mAh/2h Photo format: JPEG Video format: MP4/AVI Support system: ios/android Transmission Distance: 5m Certification:CE/RoHS/FCC/ISO9001 APP: Inskam	5.5mm	1m	308	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			5.5mm	3.5m	345	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			5.5mm	5m	400	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			5.5mm	10m	599	15.6*13.4*7.6	32pcs/CTN; 50*40*40

	WIFI-720P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 109-4		Camera outer diameter: 8mm Image resolution: 1280*720 Video resolution: 640*480 Waterproof rating: IP67 Lights: 8 adjustable white LEDs Focal length: 4-10cm Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Battery capacity: 2000mAh/3h Photo format: JPEG Video format: MP4/AVI Support system: ios/android Transmission Distance: 5m Certification:CE/RoHS/FCC/ISO9001/ Telec APP: Inskam	8mm	1m	300	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			8mm	3.5m	337	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			8mm	5m	402	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			8mm	10m	537	15.6*13.4*7.6	32pcs/CTN; 50*40*40
			8mm dual lens	1m	366	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			8mm dual lens	5m	403	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			8mm dual lens	10m	479	15.6*13.4*7.6	32pcs/CTN; 50*40*40

	WIFI-720P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 109-5		Camera outer diameter: 5.5mm Image resolution: 1280*720 Video resolution: 640*480 Waterproof rating: IP67 Lights: 6 adjustable white LEDs Focal length: 4-10cm Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Battery capacity: 2000mAh/3h Photo format: JPEG Video format: MP4/AVI Support system: ios/android Transmission Distance: 5m Certification:CE/RoHS/FCC/ISO9001/ Telec APP: Inskam	5.5mm	1m	331	15.4*13.4* 7.2	45pcs/CTN; 50*40*40
			5.5mm	2m	345	15.4*13.4* 7.2	45pcs/CTN; 50*40*40
			5.5mm	3.5m	360	15.4*13.4* 7.2	45pcs/CTN; 50*40*40
			5.5mm	5m	403	15.4*13.4* 7.2	45pcs/CTN; 50*40*40
			5.5mm	10m	479	15.6*13.4* 7.6	32pcs/CTN; 50*40*40

	WIFI-5MP-Auto Focus	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 109A		Camera outer diameter: 11.2mm Auto focus Image resolution: 2592*1944, 1920*1080, 1280*720, 640*480 Video resolution: 640*480 Waterproof rating: IP67 Lights: 4 adjustable white LEDs Focal length: 3cm-∞ Power supply: 5V DC Frame rate: 25FPS Viewing angle: 70 degrees Operating Temperature: 0-70℃ Battery capacity: 2000mAh/3h Photo format: JPEG Video format: MP4/AVI Support system: ios/android Transmission Distance: 5m Certification: CE/RoHS/FCC/ISO9001/Telec APP: Inskam	11.2mm	1m	331	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			11.2mm	3.5m	360	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			11.2mm	5m	403	15.4*13.4*7.2	45pcs/CTN; 50*40*40
			11.2mm	10m	479	15.6*13.4*7.6	32pcs/CTN; 50*40*40

	WIFI-1440P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W600		Camera outer diameter:7.9mm/5.5mm Image resolution: 2560*1440P Video resolution: 1920*1080P Waterproof rating: IP67 Lights: 8 adjustable white LEDs Focal length: 2-10cm Power supply: 5V DC Frame rate: 20FPS Viewing angle: 70-78degrees Operating Temperature: 0-45℃ Battery capacity:850mAh/2.5h Photo format: JPEG Video format: MP4 Support system: ios/android Transmission Distance: 5m Certification:CE/RoHS/FCC App name: ANESOK	7.9mm Single lens	1m	290	14*13.5* 5.5	42pcs/CTN; 57*24.5*42
			7.9mm Single lens	5m	336	14*13.5* 5.5	42pcs/CTN; 57*24.5*42
			7.9mm Dual lens	1m	290	14*13.5* 5.5	42pcs/CTN; 57*24.5*42
			7.9mm Dual lens	5m	336	14*13.5* 5.5	42pcs/CTN; 57*24.5*42
			7.9mm Dual lens	10m	491	14*13.5* 5.5	42pcs/CTN; 57*24.5*42

	WIFI-1440P	Specifications	Probe diameter	Length	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W200		Camera outer diameter: 7.9mm/5.5mm Image resolution: 2560*1440P Video resolution: 1920*1080P Waterproof rating: IP67 Lights: 8 adjustable white LEDs Cable length: 1m/5m/10m Focal length: 2-10cm Power supply: 5V DC Frame rate: 20FPS Viewing angle: 70 degrees Operating Temperature: 0-45°C Battery capacity: 1000mAh/4h Photo format: JPEG Video format: MP4 Support system: ios/android Transmission Distance: 5m Certification: CE/RoHS/FCC App name: ANESOK	7.9mm Single lens	1m	280	14*13.5* 5.5	42pcs/CTN; 51*27*40
			7.9mm Single lens	5m	376	14*13.5* 5.5	42pcs/CTN; 51*27*40
			7.9mm Single lens	10m	430	14*13.5* 5.5	42pcs/CTN; 51*27*40
			7.9mm Dual lens	1m	280	14*13.5* 5.5	42pcs/CTN; 51*27*40
			7.9mm Dual lens	5m	376	14*13.5* 5.5	42pcs/CTN; 51*27*40
			7.9mm Dual lens	10m	430	14*13.5* 5.5	42pcs/CTN; 51*27*40
			5.5mm Dual lens	5m	430	14*13.5* 5.5	42pcs/CTN; 51*27*40

Kid Microscope							
	500X -2inch IPS	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 355		Display screen: 2-inch IPS screen Pixel: 2 million Pixels Magnification: 500x Focusing range: 0mm Light source: 8 LED lights Image format: JPG Video format: AVI Power supply: 600mAh Working time: about 1.5h Charging time: about 1.5h Support system: Windows XP/Vista/Win7/8/10/11, Mac11.0 or above	2MP	Pink/ Purple	150g/pc; 16kg/ CTN	19.8*9.3* 3.2	100pcs/CTN; 48.5*41*33
	500X -2inch IPS	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 370		Display screen: 2-inch IPS screen Pixel: 2 million Pixels Magnification: 500x Focusing range: 0mm Light source: 8 LED lights Image format: JPG Video format: AVI Power supply: 600mAh Working time: about 1.5h Charging time: about 1.5h Support system: Windows XP/Vista/Win7/8/10/11, Mac11.0 or above	2MP	Black	120g/pc; 15.5kg/ CTN	13.1*8.1* 3.7	120pcs/CTN; 41*38.2*34

	1000X -2inch IPS	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 372		Display screen: 2-inch IPS screen Pixel: 2 million Pixels Magnification: 1000x Focusing method: Manual focus Light source: 8 LED lights Image format: JPG Video format: AVI Power supply: 600mAh/2h Support system: Windows XP/Vista/Win7/8/10/11, Mac11.0 or above	2MP	white/ orange /brown	256g/pc; 16.5kg/ CTN	16*9.5*7.8	60pcs/CTN; 52.5*44.3*41.5

USB Microscope							
	USB-0.3MP- without stand	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 321		USB interface Pixel: 300,000 pxels Cable length: 1.5M Focusing range: 0-40mm Magnification: 1600X Resolution: 640*480 LED lamp: 8LED Image Format: JPEG Video Format:MP4/AVI Support system: Windows vista/7/8/10/11+, Mac OS X 11.0+ APP: Inskam and View Play Cap Certification:CE/RoHS/ISO9001	0.3MP	Black	95g/pc; 11kg/CTN	15*6*4	100pcs/CTN; 51*29.5*30
	USB-0.3MP- with stand	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 321		USB interface Pixel: 300,000 pxels Cable length: 1.5M Focusing range: 0-40mm Magnification: 1600X Resolution: 640*480 LED lamp: 8LED Image Format: JPEG Video Format:MP4/AVI Support system: Windows vista/7/8/10/11+, Mac OS X 11.0+ APP: Inskam and View Play Cap Certification:CE/RoHS/ISO9001	0.3MP	Black	175g/pc; 16.8kg/ CTN	14.5*5.7* 10	90pcs/CTN; 56.5*30.5*52

3 IN 1 (Micro USB&USB&USB-C) Microscope							
	Micro USB&USB&USB-C- 0.3MP-without stand	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 321		Micro USB/USB/USB-C interface Pixel: 300,000 pxels Cable length: 1.5M Focusing range: 0-40mm Magnification: 1600X Resolution: 640*480 LED lamp: 8LED Image Format: JPEG Video Format:MP4/AVI Support system: Android 6.0+/Windows vista/7/8/10/11+, Mac OS X 11.0+ APP: Inskam and View Play Cap Certification:CE/RoHS/ISO9001	0.3MP	Black	105g/pc; 12kg/ CTN	15*6*4	100pcs/CTN; 51*29.5*30
	Micro USB&USB&USB-C- 0.3MP-with stand	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 321		Micro USB/USB/USB-C interface Pixel: 300,000 pxels Cable length: 1.5M Focusing range: 0-40mm Magnification: 1600X Resolution: 640*480 LED lamp: 8LED Image Format: JPEG Video Format:MP4/AVI Android 6.0+/Windows vista/7/8/10/11+, Mac OS X 11.0+ APP: Inskam and View Play Cap Certification:CE/RoHS/ISO9001	0.3MP	Black	185g/pc; 17.7kg/ CTN	14.5*5.7* 10	90pcs/CTN; 56.5*30.5*52

	Micro USB&USB&USB-C- 2MP-with stand	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 321-B		Micro USB/USB/USB-C interface Pixel: 2MP Cable length: 1.5M Focusing range: 0-40mm Magnification: 1600X Resolution: 1920*1080 LED lamp: 8LED Image Format: JPEG Video Format:MP4/AVI Android 6.0+/Windows vista/7/8/10/11+, Mac OS X 11.0+ APP: Inskam and View Play Cap Certification:CE/RoHS/ISO9001	2MP	Black	185g/pc; 17.7kg/ CTN	14.5*5.7* 10	90pcs/CTN; 56.5*30.5*52

	Type-C and Lightning-2MP- with stand	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 321-P		Type-C and Lightning interface Pixel: 2MP Cable length: 1.5M Focusing range: 0-90mm Magnification: 1600X Resolution: 1920*1440 LED lamp: 8LED Image Format: JPEG Video Format:MP4/AVI Support system: IOS10.0+/Android6.0+ APP: Sup-Anesok Certification:CE/RoHS/ISO9001	2MP	Black	200g/pc; 19kg/ CTN	14.5*5.7* 10	90pcs/CTN; 56.5*30.5*52
	Type-C and Lightning-2MP	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 320-P		Type-C and Lightning interface Pixel: 2MP Cable length: 1.5M Focusing range: 0-90mm Magnification: 1600X Resolution: 1920*1440 LED lamp: 8LED Image Format: JPEG Video Format:MP4/AVI Support system: IOS10.0+/Android6.0+ APP: Sup-Anesok Certification:CE/RoHS/ISO9001	2MP	Black	/	/	100pcs/CTN; 53*31.5*32

WIFI Microscope							
	1000X-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 314		Pixel: 0.3MP Magnification: 1000x Resolution: 640*480 LED light: 8LED Picture format: JPG Video format: MP4/AVI Support system: Android 4.4, iOS8.0, win7/8/10+, Mac Battery capacity: 550mah/1h APP: Max-see and Smart Camera Color: White/black Certification:CE/RoHS/FCC/ISO9001/Telec	0.3MP	Black/ White	275g/pc; 16kg/CTN	16.2*11.6*4.7	54pcs/CTN; 53*29*37
	1000X-WIFI-Without Stand	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 320		Pixel: 2 million pixels Magnification: 50-1000x Focusing range: 2-60mm Picture resolution 1920*1080P Video resolution 1280*720P Light source: 8LED Picture format: JPG Video format: AVI Power supply: 800mAh Working time: about 1.5h Charging time: about 1.5h Support system: WindowsXP, Vista, Win7/8/10/11+, Mac11. 0+, Android 6.0+ , iOS 9.0+ APP: Max-view and Smart Camera Certification:CE/RoHS/FCC/	2MP	Black/ White	130g/pc; 14kg/CTN	15*6*4	100pcs/CTN; 51*29.5*30

	1000X-WIFI-With Stand	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 320		Pixel: 2 million pixels Magnification: 50-1000x Focusing range: 2-60mm Picture resolution 1920*1080P Video resolution 1280*720P Light source: 8LED Picture format: JPG Video format: AVI Power supply: 800mAh Working time: about1.5h Charging time: about1.5h Support system: WindowsXP, Vista, Win7/8/10/11+, Mac11. 0+, Android 6.0+ , iOS 9.0+ Certification:CE/RoHS/FCC	2MP	Black/ White	520g/pc; 18kg/ CTN	15.4*13*11	32pcs/CTN; 57*49*35

	1000X-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 316-B		Pixel: 2MP Magnification: 1000x Resolution: 1920*1080 LED light: 8LED Focusing range: 3-40cm Picture format: JPG Video format: MP4/AVI Support system: Android 4.4, iOS 9.0, Win/7/8/10, MacOS X 10.8+ Battery capacity: 550mah/1h APP: Max-see and Smart Camera Color: Black/White Certification: CE/RoHS/FCC/ISO9001	2MP	Pearl white/ Frosted black	285g/pc; 16.8kg/ CTN	18.8*11.8* 4.8	54pcs/CTN; 57.3*30*37.5
	1000X-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 303-B		Pixel: 2MP Magnification: 1000x Resolution: 1920*1080 LED light: 8LED Picture format: JPG Video format: MP4/AVI Support system: Android 4.4, iOS8.0, win7/8/10+, Mac Battery capacity: 800mah/2h APP: Max-see and Smart Camera Color: Black/blue/gray Certification: CE/RoHS/FCC/ISO9001/ Telec	2MP	Black / Gray / Blue	320g/pc; 18kg/CTN	16.2*11.6* 4.7	54pcs/CTN; 53*29*37

	2000X-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 315-W		Pixel: 5MP Magnification: 0-2000x WiFi connection distance: 5m Focus range: 0-70mm Focus mode: Manual focus knob Focus range: 2-55mm USB interface type: USB2.0 Picture format: JPG Video format: MP4/AVI light source: 10 bright LEDs + 1 super bright LED light Dynamic frame number: 20-30f/s Power supply: 1800mAh Working time: 5h Charging time: 3h Support system: Android 8.0, iOS 8.0 +, WindowsXP, Vista, Win7/8/10, Mac10.8+ APP: Wifi Check and Smart Camera Certification:CE/RoHS/FCC/ISO9001	5MP	Black	1200g/pc; 16kg/CTN	27.5*22*16	12pcs/CTN; 57*51*46

Microscope with Screen

	1000X-4.3inch IPS	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 306-C		Pixel: 2MP Magnification: 1000x Resolution: 1920*1080 LED lamp: 8LED Focusing range: 0-40mm Image Format: JPEG Video Format:MP4/AVI Battery capacity: 1200mah/1.5h Support system: WindowsXP, Vista, Win7/8/10, Mac10.5+ Certification:CE/RoHS/ISO9001	2MP	Black	710g/pc; 9.6kg/ CTN	29*16.5* 12.5	12pcs/CTN; 52.5*53*31.5
	1000X-4.3inch IPS	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 307-C		Pixel: 2MP Magnification: 1000x Resolution:1920*1080 LED lamp: 8LED Focusing range: 0-40mm Image Format: JPEG Video Format:MP4/AVI Battery capacity: 2000mah/3h Support system: WindowsXP, Vista, Win7/8/10/11, Mac11.0+ Certification:CE/RoHS/ISO9001	2MP	Black	600g/pc; 17CTN	18.3*15.5* 11.8	27pcs/CTN; 59.5*39*49.6

	1000X-4.3inch IPS	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 369		Screen size: 4.3 inches IPS Storage: built-in 32M storage, capable of taking around 100 photos Pixel: 2 million pixels Magnification: 50-100x Image resolution: 1920 * 1080 Video resolution: 1920 * 1080 Focusing range: 0-90mm Light source: 8LED Battery capacity: 2000mAh/3.5h Image format: JPG Video format: AVI Supported systems: Windows XP/Vista/Win7/8/10/11, Mac11.0 or above	2MP	Black	477g/pc; 15.5CTN	17.5*13*9.3	30pcs/CTN; 52*44*40

	2000X-7inch IPS	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 315		Pixel: 12MP Magnification: 0-2000x Resolution: 4032*3024/3264*2448/2592*1944/1280*960/640*480 LED lamp: 10pcs highlight LED+1pc super bright LED Focusing range: 0-60mm Battery capacity: 2600mah/4h Image format: JPG video format: MOV Support system: WindowsXP, Vista, Win7/8/10, Mac10.5+ Certification:CE/RoHS/ISO9001	12MP	Black	1300g/pc; 17kg/ CTN	27.5*22*16	12pcs/CTN; 57*51*46

	1600X-7inch IPS	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 318		Display screen: 7-inch IPS Pixel: 12 million pixels Magnification factor: 50-1600x Focusing range: 30-90mm Image resolution 4032 * 3024P Video resolution 1920 * 1080P Light source: 28 bright LEDs Image format: JPG Video format: MOV Power supply: 3000mAh/2h Remote control: 2.4G wireless remote control Supported systems: Windows XP, Vista, Win7/8/10/11, Mac11.0 or above	12MP	Black	2600g/pc; 16.6kg/ CTN	31.6*28.3* 16	6pcs/CTN; 58.5*50*33.5
	1600X-7inch IPS-Auto focus	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 318-B		Display screen: 7-inch IPS Pixel: 12 million pixels Magnification factor: 50-1600x Focusing range: 90mm Image resolution 4032 * 3024P Video resolution 1920 * 1080P Light source: 28 bright LEDs Image format: JPG Video format: MOV Power supply: 3000mAh/2h Remote control: 2.4G wireless remote control Supported systems: Windows XP, Vista, Win7/8/10/11, Mac11.0 or above	12MP	Black	2600g/pc; 17.1kg/ CTN	31.6*28.3* 16	6pcs/CTN; 58.5*50*33.5

	1600X-10.1inch IPS-Auto focus	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 318-C		Display screen: 10.1-inch IPS Pixel: 12 million pixels Magnification factor: 50-1600x Focusing range: 90mm Image resolution 4032 * 3024P Video resolution 1920 * 1080P Light source: 28 bright LEDs Image format: JPG Video format: MOV Power supply: 3000mAh/2h Remote control: 2.4G wireless remote control Supported systems: Windows XP, Vista, Win7/8/10/11, Mac11.0 or above	12MP	Black	2750g/pc; 18kg/ CTN	31.6*29.1* 18.5	6pcs/CTN; 59.5*57.4*33. 5

	1200X-7inch TN	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 331-A		Display screen: 7-inch TN Pixel: 12 million pixels Magnification factor: 50-1200x Focusing range: 2-60mm Image resolution 4032 * 3024P Video resolution 1920 * 1080P Light source: 28 bright LEDs Image format: JPG Video format: MOV Power supply: 3000mAh/2h Remote control: 2.4G wireless remote control Supported systems: Windows XP, Vista, Win7/8/10/11, Mac11.0 or above	12MP	Black	2350g/pc; 15.5kg/ CTN	32.6*28.1* 12.7	6pcs/CTN; 51*41.5*36.5
	1200X-7inch IPS	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 331-B		Display screen: 7-inch IPS Pixel: 12 million pixels Magnification factor: 50-1200x Focusing range: 2-60mm Image resolution 4032 * 3024P Video resolution 1920 * 1080P Light source: 28 bright LEDs Image format: JPG Video format: MOV Power supply: 3000mAh/2h Remote control: 2.4G wireless remote control Supported systems: Windows XP, Vista, Win7/8/10/11, Mac11.0 or above	12MP	Black	2350g/pc; 15.5kg/ CTN	32.6*28.1* 12.7	6pcs/CTN; 51*41.5*36.5

	1600X-7inch IPS-Auto focus	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 331-C		Display screen: 7-inch IPS Pixel: 12 million pixels Magnification factor: 50-1600x Focusing range: 90mm Image resolution 4032 * 3024P Video resolution 1920 * 1080P Light source: 28 bright LEDs Image format: JPG Video format: MOV Power supply: 3000mAh Remote control: 2.4G wireless remote control Working time: about 2 hours Charging time: about 3 hours Supported systems: Windows XP, Vista, Win7/8/10/11, Mac11.0 or above	12MP	Black	2350g/pc; 15.5kg/ CTN	32.6*28.1* 12.7	6pcs/CTN; 51*41.5*36.5

	1200X-10.1inch IPS	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 351-A		Display screen: 10.1-inch IPS Pixel: 12 million pixels Magnification factor: 50-1200x Focusing range: 2-60mm Image resolution 4032 * 3024P Video resolution 1920 * 1080P Light source: 28 bright LEDs Image format: JPG Video format: MOV Power supply: 3000mAh/2h Remote control: 2.4G wireless remote control Supported systems: Windows XP, Vista, Win7/8/10/11, Mac11.0 or above	12MP	Black	2500g/pc; 16.5kg/ CTN	32.6*28.1* 12.7	6pcs/CTN; 51*41.5*36.5
	1200X-10.1inch IPS	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 351-B		Display screen: 10.1-inch IPS Pixel: 12 million pixels Magnification factor: 50-1200x Focusing range: 2-60mm Image resolution 4032 * 3024P Video resolution 1920 * 1080P Light source: 28 bright LEDs Image format: JPG Video format: MOV Power supply: 3000mAh/2h Remote control: 2.4G wireless remote control Supported systems: Windows XP, Vista, Win7/8/10/11, Mac11.0 or above	12MP	Black	2500g/pc; 16.5kg/ CTN	32.6*28.1* 12.7	6pcs/CTN; 51*41.5*36.5

	1600X-10.1inch IPS-Auto focus	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 351-C		Display screen: 10.1-inch IPS Pixel: 12 million pixels Magnification factor: 50-1600x Focusing range: 90mm Image resolution 4032 * 3024P Video resolution 1920 * 1080P Light source: 28 bright LEDs Image format: JPG Video format: MOV Power supply: 3000mAh Remote control: 2.4G wireless remote control Working time: about 2 hours Charging time: about 3 hours Supported systems: Windows XP, Vista, Win7/8/10/11, Mac11.0 or above	12MP	Black	2750g/pc; 18kg/ CTN	32.6*28.1* 12.7	6pcs/CTN; 51*41.5*36.5

Ear Irrigator without camera							
	Without camera	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
E10		1. Only using water of LUKEWARM (98.6-104°F / 37-40°C) to avoid dizziness or any other discomfort. 2. Both water or right proportion of water with vinegar or with hydrogen peroxide can gain a good result. 1 part white vinegar and 4 parts water OR 1 OTC (3%) hydrogen peroxide and 4 parts water. 3. Fill the bottle with warm water and attach the sprayer. Twist a disposable tip onto the nozzle.	/	White+ blue	/	16.4*12.3*7.7	68pcs/CTN; 51*47*49
	Without camera	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
E20		1. Only using water of LUKEWARM (98.6-104°F / 37-40°C) to avoid dizziness or any other discomfort. 2. Both water or right proportion of water with vinegar or with hydrogen peroxide can gain a good result. 1 part white vinegar and 4 parts water OR 1 OTC (3%) hydrogen peroxide and 4 parts water. 3. Fill the bottle with warm water and attach the sprayer. Twist a disposable tip onto the nozzle.	/	White+ blue	241g/pc; 17.5kg/ CTN	10.7*15*7.7	68pcs/CTN; 51*47*49

	Without camera	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W10		1. Only using water of LUKEWARM (98.6-104°F / 37-40°C) to avoid dizziness or any other discomfort. 2. Both water or right proportion of water with vinegar or with hydrogen peroxide can gain a good result. 1 part white vinegar and 4 parts water OR 1 OTC (3%) hydrogen peroxide and 4 parts water. 3. Fill the bottle with warm water and attach the sprayer. Twist a disposable tip onto the nozzle.	/	White+ blue	241g/pc; 17.5kg/ CTN	10.7*15*7.7	68pcs/CTN; 51*47*49

	Without camera	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
E30		Water Bottle Capacity:200ml Pressure: 7-24.5 PSI Modes:Normal mode/ Soft model/Pulse model/Strong mode Battery Capacity:2000mAh LED light: 5pcs Charging Time: 3hours Working Time: 7hours Electric ear irrigation *1 Ear catch basin*1 Disposable ear tips*9 Charging cable*1 User manual*1	/	Black	450g/pc; 18.5kg/ CTN	16.3*16.1*8	36pcs/CTN; 53.5*51*37
	Without camera	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W30		Water Bottle Capacity:500ml Pressure: 7-24.5 PSI Modes:Normal mode/ Soft model/Pulse model/Strong mode Battery Capacity:2000mAh/7h LED light: 5pcs Charging Time: 3hours Electric ear irrigation *1 Ear catch basin*1 Disposable ear tips*9 Five holes tips*1 Charging cable*1 Square towel *1 User manual*1	/	Blue/ Purple/ Pink/ Dark blue/ Black/ Green	480g/pc; 16kg/ CTN	19*15.5*11	30pcs/CTN; 58*49*42

	Without camera	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W60		Water Bottle Capacity:250ml Pressure: 7-24.5 PSI Modes:Normal mode/ Soft model/Pulse model/Strong mode Battery Capacity:2000mAh Charging Time: 3hours Working Time: 7hours Electric ear irrigation *1 Ear catch basin*1 Ear tips*10 Charging cable*1 User manual*1	/	Black	532g/pc; 18.5kg/ CTN	25.3*10.3* 6.7	30pcs/CTN; 54*31.5*44
	Without camera	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W70		Water Bottle Capacity:250ml Pressure: 7-24.5 PSI Modes:Normal mode/ Soft model/Pulse model/Strong mode Battery Capacity:2000mAh Charging Time: 3hours Working Time: 7hours Electric ear irrigation *1 Ear catch basin*1 Ear tips*9 Charging cable*1 User manual*1	/	Black	543g/pc; 19kg/ CTN	25.3*10.3* 6.7	32pcs/CTN; 54*31.5*44

	Without camera	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
E60		Water Bottle Capacity:250ml Pressure: 7-24.5 PSI Modes:Normal mode/ Soft model/Pulse model/Strong mode Battery Capacity:2000mAh Charging Time: 3hours Working Time: 7hours Electric ear irrigation *1 Ear catch basin*1 Ear tips*10 Charging cable*1 User manual*1	/	Black	532g/pc; 18.5kg/ CTN	25.3*10.3* 6.7	30pcs/CTN; 54*31.5*44
	Without camera	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W80		Water Bottle Capacity:250ml Pressure: 7-24.5 PSI Modes:Normal mode/ Soft model/Pulse model/Strong mode Battery Capacity:2000mAh Charging Time: 3hours Working Time: 7hours Electric ear irrigation *1 Ear catch basin*1 Ear tips*9 Charging cable*1 User manual*1	/	Black	425g/pc; 18kg/ CTN	16.6*9*7	40pcs/CTN; 40.5*38.5*38

Ear Irrigator with camera							
	2MP-With camera	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
E50		Camera Pixel: 2MP Water Bottle Capacity:200ml Pressure: 7-24.5 PSI Modes:Normal mode/ Soft model/Pulse model/Strong mode Battery Capacity:2000mAh/7h LED light: 5pcs Charging Time: 3hours Electric ear irrigation *1 Ear catch basin*1 Ear tips*9 Charging cable*1 User manual*1 APP: Soulear	/	Black	423g/pc; 16.5kg/ CTN	16.3*16.1*8	36pcs/CTN; 53.5*51*37
	2MP-With camera	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
W50		Camera Pixel: 2MP Water Bottle Capacity:500ml Pressure: 7-24.5 PSI Modes:Normal mode/ Soft model/Pulse model/Strong mode Battery Capacity:2000mAh/7h LED light: 5pcs Charging Time: 3hours Electric ear irrigation *1 Ear catch basin*1 Ear tips*9 Charging cable*1 Square towel *1 User manual*1 APP: Soulear	/	Black	512g/pc; 17kg/ CTN	24.5*18.4*9	30pcs/CTN; 58*51*48

	USB ear camera						
	5.1mm-USB cable	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
B5		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 5.1mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Picture format: JPG Video format: MP4/AVI Support system: android Certification:CE/RoHS/FCC/ISO9001/ FDA APP: Soulear	5MP	Black/ White	50g/pc; 11kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29

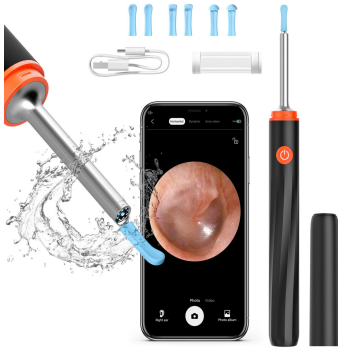
	Wifi ear camera						
	5.1mm-WIFI by cable	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
N1		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 5.1mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA APP: Soulear	5MP	Black/ White	50g/pc; 11kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29

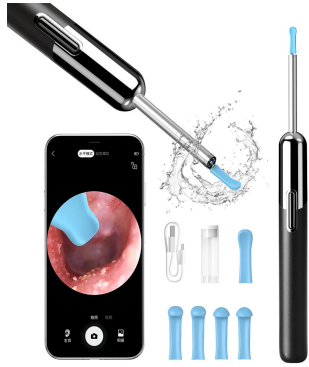
	5.1mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
B3		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 5.1mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity: 170mhA/40mins APP: Soulear	5MP	Black/ White	50g/pc; 11kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29
	5.1mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
N3		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 5.1mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity: 170mhA/40mins APP: Soulear	5MP	Black/ White	50g/pc; 11kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29

	4.4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
B3 Pro		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4.4mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity: 170mAh/40mins APP: Soulear	5MP	Black/ White	50g/pc; 11kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29
	4.4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
B6		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4.4mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity: 170mAh/40mins APP: Soulear	5MP	Black/ White	50g/pc; 11kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29

	4.4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
N3 Pro		Camera Pixel:8MP Camera diameter: 4.4mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 240mAh/1h APP: Soulear	8MP	Black/ White	48g/pc; 11kg/CTN	17*6.6*1.8	200pcs/CTN; 47*36*29
	4.4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
X9		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4.4mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 350mAh/1h Sensor: 3 Axis APP: Soulear	5MP	Blue/ Green/ White/ Black	65g/pc; 14.5kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29

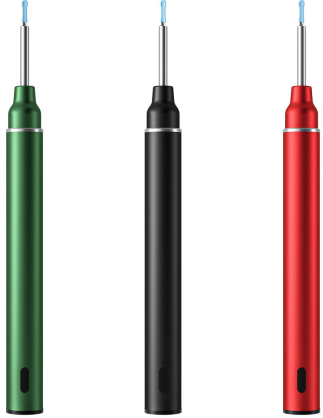
	4.4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
N3 Pro-B		Camera Pixel: 8MP Camera diameter: 4.4mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 240mAh/1h APP: Soulear	8MP	Black/ White	48g/pc; 11kg/CTN	17*6.6*1.8	200pcs/CTN; 47*36*29
	4.4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Find B Pro-GP		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4.4mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 240mAh/40 mins Sensor: 3 Axis APP: Soulear	5MP	Black/ White	70g/pc; 15.5kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29

	4.4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Find U		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4.4mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 240mAh/40 mins Sensor: 3 Axis APP: Soulear	5MP	Black/ White	70g/pc; 15.5kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29
Find N		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4.1mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity: 350mAh/1h Sensor: 3Axis APP: Suear	5MP	Black+ orange/ Black+ blue	50g/pc; 11kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29

	4.4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
N5		Camera Pixel: 8MP Camera diameter: 4.4mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity: 350mhA/1h Sensor: 3 Axis APP: Soulear	8MP	Black/ White	50g/pc; 11kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29
	4.4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
N6		Camera Pixel: 8MP Camera diameter: 4.4mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity: 350mhA/1h Sensor: 3 Axis APP: Soulear	8MP	Black/ White	50g/pc; 11kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29

	4.4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
N7		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4.4mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity: 350mhA/1h Sensor: 3 Axis APP: Soulear	5MP	Black/ White	50g/pc; 11kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29
	3.9mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
P42		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 3.9mm 6 led lights Material: Metal Angle of view: 70° Focal length: 1.5-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 350mhA/1h Sensor: 6 Axis APP: Timesiso	5MP	Red/ Black/ Green	69g/pc; 7.5kg/ CTN	17.2*7.6*3	100pcs/CTN; 52*42*26

	4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
X6		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4mm 6 led lights Material: Aluminum + PC+ABS Angle of view: 95° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 350mAh/1.5h Sensor: 6 Axis APP: Suear	5MP	Black/ White	70g/pc; 15kg/CTN	17*6.6*1.8	200pcs/CTN; 47*36*29
	4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
X1		Camera Pixel: 5MP Camera diameter: 4mm 6 led lights Material: Aluminum + PC+ABS Angle of view: 93° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 350mAh/ 1h Sensor: 6 Axis APP: Suear	5MP	Black/ White	50g/pc; 11kg/CTN	17*6.6*1.8	200pcs/CTN; 47*36*29

	4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
P40-B		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4mm 6 led lights Material: Metal Angle of view: 70° Focal length: 1.5-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 350mAh/1h Sensor: 6 Axis APP: Suear	5MP	Red/ Black/ Green	51g/pc; 11kg/CTN	17*6.6*1.8	200pcs/CTN; 47*36*29

	4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
X3		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4mm 6 led lights Material: Aluminum + PC+ABS Angle of view: 95° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 350mAh/1.5h Sensor: 6 Axis APP: Suear	5MP	Black/ White	50g/pc; 11.5kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29
	4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
X8		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4mm 6 led lights Material: Aluminum + PC+ABS Angle of view: 95° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 350mAh/1.5h Sensor: 6 Axis APP: Suear	5MP	Black/ White	55g/pc; 11.5kg/ CTN	17*6.6*1.8	200pcs/CTN; 49*37*21

	4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Find S		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4mm 6 led lights Material: Aluminum + PC+ABS Angle of view: 95° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 350mAh/1.5h Sensor: 6 Axis APP: Suear	5MP	Black/ White	50g/pc; 10.5kg/ CTN	17*6.6*1.8	200pcs/CTN; 47*36*29
	4mm-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
FindA Pro		Camera Pixel: 5MP Image Resolution: 1280*720 Camera diameter: 4mm 6 led lights Material: Aluminum + PC+ABS Angle of view: 95° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Battery capacity: 350mAh/1.5h Sensor: 6 Axis APP: Suear	5MP	Black/ White	116g/pc; 11kg/ CTN	17.3*9.5*21	88pcs/CTN; 49*37*21

	4.5mm-WIFI-Manual tweezers	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S5-A		Camera Pixel: 10MP Image Resolution: 1920*1080 Camera diameter: 4.5mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/FDA Battery capacity: 350mAh/70 mins Sensor: 6 Axis APP: SUNUO	10MP	Black/blue/white	212	/	60pcs/CTN; 48*35*34
	4.5mm-WIFI-Manual tweezers	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S5		Camera Pixel: 10MP Image Resolution: 1920*1080 Camera diameter: 4.5mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/FDA Battery capacity: 350mAh/70 mins Sensor: 6 Axis APP: SUNUO	10MP	Black/blue/white	212	/	60pcs/CTN; 48*35*34

	4.5mm-WIFI-Manual tweezers--Equipped with charging box	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S5 Pro		Camera Pixel: 10MP Image Resolution: 1920*1080 Camera diameter: 4.5mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/FDA Battery capacity: 350mAh/70 mins Sensor: 6 Axis APP: SUNUO	10MP	Black/blue/white	212	/	60pcs/CTN; 48*35*34

	4.5mm-WIFI-Electric tweezers	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S9-A	 The image shows the S9-A electric tweezers, a USB charging cable, a small white case, and a smartphone displaying the SUNUO app interface with a live camera feed of the tweezers tip.	Camera Pixel: 10MP Image Resolution: 1920*1080 Camera diameter: 4.5mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/FDA Battery capacity: 350mAh/70 mins Sensor: 6 Axis APP: SUNUO	10MP	Black/blue/white	212	/	60pcs/CTN; 48*35*34
S9	 The image shows the S9 electric tweezers next to its black carrying case, which features a vertical row of colored LED lights.	Camera Pixel: 10MP Image Resolution: 1920*1080 Camera diameter: 4.5mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/FDA Battery capacity: 350mAh/70 mins Sensor: 6 Axis APP: SUNUO	10MP	Black/blue/white	212	/	60pcs/CTN; 48*35*34

	4.5mm-WIFI-Electric tweezers-Equipped with charging box	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
S9 Pro		Camera Pixel: 10MP Image Resolution: 1920*1080 Camera diameter: 4.5mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/FDA Battery capacity: 350mhA/70 mins Sensor: 6 Axis APP: SUNUO	10MP	Black/blue/wh ite	212	/	60pcs/CTN; 48*35*34

Lightning Ear Camera							
	4.1mm-Lightning	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Q5	 HD Visual Ear Spoon High appearance and high cost performance	Camera Pixel: 2MP Image Resolution: 1920*1440P Camera diameter:4.1mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios Line lenght:1m Sensor: 6 Axis APP: Super-anesok	0.3MP	Black	50g/pc; 11kg/CTN	17*6.6*1.8	200pcs/CTN; 47*36*29
	4.3mm-Type-C cable and Lightning adaptor	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Q8		Camera Pixel: 2K Image Resolution: 1920*1080P Camera diameter:4.3mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/FDA Battery capacity: 1000mhA/70 mins Sensor: 6 Axis APP: Suear	2K	Black	205	/	52pcs/CTN; 47*36*29

	Ear camera with screen						
	3.9mm-5inch screen-2K	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
P90		Camera Pixel: 2K Screen: 5inch IPS screen Camera diameter: 3.9mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Line lenght: 1m Memory card: Build-in 32GB Battery capacity: 2000mhA/3.5h	2K	White+ blue	412	/	42pcs/CTN; 57*42*25
	3.9mm-4.3inch screen-2K	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
P80-B		Camera Pixel: 2K Screen: 4.3inch IPS screen Camera diameter: 3.9mm 6 led lights Material: PC+ABS Angle of view: 83° Focal length: 1.4-2cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Line lenght: 1m Memory card: Build-in 32GB Battery capacity: 2000mhA/3.5h	2K	White+ blue	412	/	42pcs/CTN; 57*42*25

Wifi Oral Endoscope							
	2MP-WIFI & PC	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
Inskam 401-B		Image Resolution: 1920*1080(phone), 1280*720(PC) Camera diameter: 11.2mm 8 led lights Material: PC+ABS Focal length: 2-4cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android/PC Battery capacity:850mhA/3h USB-C charging APP: ANESOK	2MP	Green	270g/pc; 17.5kg/ CTN	29.1*9*4	62pcs/CTN; 50*40*40
	2MP-WIFI & PC	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
T7		Camera Pixel: 2MP Image Resolution: 1920*1080(phone), 1280*720(PC) 8 led lights Material: PC+ABS Focal length: 0.3-1cm Waterproof: IP67 Picture format: JPG Video format: MP4/AVI Support system: ios/android/PC CE/RoHS/FCC/ISO9001/ FDA Battery capacity:1000mhA/4h USB-C charging APP: Inskam	2MP	White	335g/pc; 16kg/ CTN	17.3*11.8* 6.2	45pcs/CTN; 54.5*38.5*34

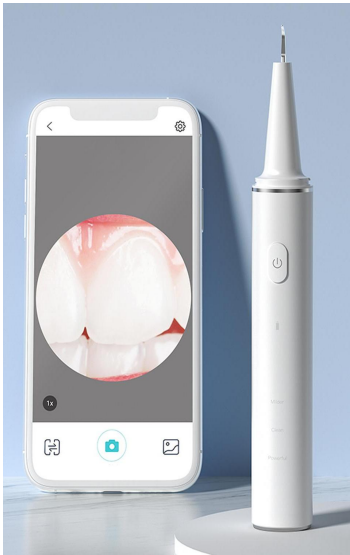
Ultrasonic dental scaler							
	Without camera	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
T15		Material: PC+ABS Waterproof: IP67(whole body) Certification:CE/RoHS/FCC/ ISO9001/ FDA Battery capacity:1200mAh/1.5h 1year warranty	/	White/ Blue	280g/pc; 18kg/ CTN	22.5*14.6*6	60pcs/CTN; 53*30*47.3
	Without camera	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
T9-B		Material: PC+ABS Waterproof: IP67(whole body) Certification:CE/RoHS/FCC/ ISO9001/ FDA Battery capacity:1200mAh/1.5h 1year warranty	/	White/ Blue	280g/pc; 18kg/ CTN	22.5*14.6*6	60pcs/CTN; 53*30*47.3

	Without camera	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
T9		Material: PC+ABS Waterproof: IP67(whole body) Certification:CE/RoHS/FCC/ ISO9001/ FDA Battery capacity:1200mAh/1.5h 1year warranty	/	White/ Blue	320g/pc; 21.5kg/ CTN	22.5*14.6*6	60pcs/CTN; 53*30*47.3

	WIFI-2MP-with camera	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
T15 Pro		Camera Pixel: 2MP Image Resolution: 1280*720 8 led lights Material: PC+ABS Angle of view: 70° Waterproof: IP67(whole body) Focal length: 0-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/FDA Battery capacity:1200mAh/1.5h APP: Sunuo	/	White/ Blue	320g/pc; 21.5kg/ CTN	22.5*14.6*6	60pcs/CTN; 53*30*47.3
	WIFI-2MP-with camera	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
T10 pro		Camera Pixel: 2MP Image Resolution: 1280*720 8 led lights Material: PC+ABS Angle of view: 70° Waterproof: IP67(whole body) Focal length: 0-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/FDA Battery capacity:1200mAh/1.5h APP: Sunuo	2MP	White/ Blue	290g/pc; 18kg/ CTN	22.5*14.6*6	60pcs/CTN; 54*31*48

	WIFI-2MP-with camera	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
<u>T12 Pro</u>		Camera Pixel: 2MP Image Resolution: 1280*720 8 led lights Material: PC+ABS Angle of view: 70° Waterproof: IP67(whole body) Focal length: 0-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity:1200mhA/1.5h APP: Sunuo Needle head and Flat head, Easy replacement	2MP	White/ Blue	303g/pc; 19.5kg/ CTN	22.5*14.6*6	60pcs/CTN; 54*31*48

	WIFI-2MP-with camera and Sterilization box	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
<u>T12 Plus</u>		Camera Pixel: 2MP Image Resolution: 1280*720 8 led lights Material: PC+ABS Angle of view: 70° Waterproof: IP67(whole body) Focal length: 0-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity:1200mAh/1.5h APP: Sunuo Needle head and Flat head, Easy replacement,Sterilization box	2MP	White/ Blue / Black	360g/pc; 11.5kg/ CTN	22.5*14.6*6	30pcs/CTN; 45*36*26
	WIFI-2MP-with camera	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
<u>T13 Pro</u>		Camera Pixel: 2MP Image Resolution: 1280*720 8 led lights Material: PC+ABS Angle of view: 70° Waterproof: IP67(whole body) Focal length: 0-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity:1200mAh/1.5h APP: Sunuo Needle head and Flat head, Easy replacement	2MP	White	333g/pc; 21.5kg/ CTN	22.5*14.6*6	60pcs/CTN; 61.5*46.5*30

	WIFI-5MP-with camera	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
T11 Pro		Camera Pixel: 5MP Image Resolution: 1920*1080 8 led lights Material: PC+ABS Angle of view: 70° Waterproof: IP67(whole body) Focal length: 0-2cm Picture format: JPG Video format: MP4/AVI Support system: ios/android Certification:CE/RoHS/FCC/ISO9001/ FDA Battery capacity:1200mAh/1.5h APP: Sunuo Needle head	5MP	White/ Blue	290g/pc; 18.5kg/ CTN	22.5*14.6*6	60pcs/CTN; 53*30*47.3

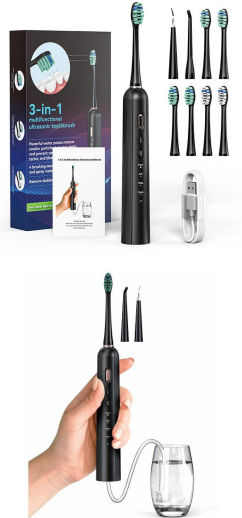
Ultrasonic denture cleaning machine							
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
UC08		High frequency 42-45KHZ Large capacity 230ML False screen display Touch the button Multi-gear adjustment True UV kill light The Hall switch stops immediately after opening the cover 304 stainless steel+ABS+PC	/	White/ Black	570g/pc; 17.5kg/ CTN	13.8*13.8*1 0.5	27pcs/CTN; 43.3*43.3*3 4
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
UC06		High frequency 42-45KHZ Large capacity 255ML False screen display Touch the button Multi-gear adjustment True UV kill light The Hall switch stops immediately after opening the cover 304 stainless steel+ABS+PC	/	White/ Black	570g/pc; 17.5kg/ CTN	13.8*13.8*1 0.5	27pcs/CTN; 43.3*43.3*3 4

	Water Flosser						
	5MP-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
C3		Product model: C3 Specification size: 148x62x47mm (without nozzle) Function mode: 3 levels (soft mode / standard mode / SPA mode) Working temperature: 5~35℃ Maximum capacity: 180ml Water pressure range: 35~140PSI Water outlet method: pulse Waterproof rating: IPX7 Endurance time: 45 days (one time a day, one minute at a time) Charging time: 3h Charging current: 1A Battery specification: 2000mAh Power cord: USB-C charging cord (universal) Noise: within 75dB Picture format: JPG Video format: MP4/AVI Support system: Android/IOS Certification:CE/RoHS/FCC/ISO9001/FDA /SRCC APP: SUNUO	5MP	White	485/pc; 23.5kg/ CTN	18.6*12.6* 5.6	46pcs/CTN; 46*38.5*39.5


	5MP-WIFI-Camera	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
C2		Product model: C2 Function mode: 5 levels Working temperature: 5~35℃ Maximum capacity: 350ml Water pressure range:40-130PSI Water outlet method: pulse Waterproof rating: IPX7 Endurance time: 45 days (one time a day, one minute at a time) Charging time: 2h Charging current: 1A Battery specification: 2000mAh Power cord: USB-C charging cord (universal) Noise: within 70dB Picture format: JPG Video format: MP4/AVI Support system: Android/IOS Certification:CE/RoHS/FCC/ISO9001/FDA /SRCC APP: SUNUO	5MP	White/ Black	500/pc; 16kg/CTN	26*11.2*7.5	30pcs/CTN; 52.5*40*36.5

	Without camera	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
C2SE		Product model: C2SE Function mode: 5 levels Working temperature: 5~35℃ Maximum capacity: 350ml Water pressure range:40-130PSI Water outlet method: pulse Waterproof rating: IPX7 Endurance time: 45 days (one time a day, one minute at a time) Charging time: 2h Charging current: 1A Battery specification: 2000mAh Power cord: USB-C charging cord (universal) Noise: within 70dB Certification:CE/RoHS/FCC/ISO9001/FDA /SRCC	/	White/ Black	500/pc; 16kg/CTN	26*11.2*7.5	30pcs/CTN; 52.5*40*36.5

Electric toothbrush

		Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
T3		Gear features: 4 mode gears and 1 water spray gear Ultrasonic frequency: 42KHZ Bluetooth version: 5.0 Power supply mode: 5V/1A Battery capacity: 1000mah Battery life: 30-75 days Charging time: 2 hours Connection method: WIFI/APP Cleaning head*1/ Sprinkler polea*1 Brush Head*6/Charging cable*1 Water pipe and gravity ball*1	/	Black /white	232/pc; 18kg/CTN	12.7*3.9*22.4	72pcs/CTN; 52.5*38*34
T3 Plus		Gear features: 4 mode gears and 1 water spray gear Ultrasonic frequency: 42KHZ Bluetooth version: 5.0 Power supply mode: 5V/1A Battery capacity: 1000mah Battery life: 30-75 days Charging time: 2 hours Connection method: WIFI/APP Waterproof: IPX7 2 min smart timer Cleaning head*1 /Sprinkler polea*1 Brush Head*6 /Charging cable*1 Water pipe and gravity ball*1	/	Black /white	350/pc; 18kg/CTN	13.8*5* 23.5	48pcs/CTN; 46.7*38.4*52.7

		Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
T3 HC		Gear features: 4 mode gears and 1 water spray gear Ultrasonic frequency: 42KHZ Bluetooth version: 5.0 Power supply mode: 5V/1A Battery capacity: 1000mah Battery life: 30-75 days Charging time: 2 hours Connection method: WIFI/APP Waterproof: IPX7 2 min smart timer	/	Black /white	/	/	/
		Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
T8		Gear characteristics: 3 force levels/5 mode levels Ultrasonic frequency: 42KHZ Bluetooth version: 5.0 Power supply mode: 5V/1A Battery capacity: 2000mah Battery life: 60-210 days Charging time: 2-3 hours Connection method: WIFI/APP Waterproof: IPX7 2 min smart timer Brush Head*6 Charging cable*1	/	Black /white	240/pc; 18.5kg/ CTN	12.7*3.9* 22.4	72pcs/CTN; 52.5*38*34

		Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
T8 Plus		Gear characteristics: 3 force levels/5 mode levels Ultrasonic frequency: 42KHZ Bluetooth version: 5.0 Power supply mode: 5V/1A Battery capacity: 2000mah Battery life: 60-210 days Charging time: 2-3 hours Connection method: WIFI/APP Waterproof: IPX7 2 min smart timer Brush Head*6 Charging cable*1	/	Black /white	365/pc; 18.8kg/ CTN	13.8*5* 23.5	48pcs/CTN; 46.7*38.4*52.7

Visual Blackhead Remover

	0.3MP-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
H100		Pixel: 0.3 million Magnification: 20X Suction Power: 60-65kpa Clean gear: soft,normal,strong Material:ABS +PC 1 device with 6 replaceable tips Battery: 800mAh Charging time: 1.5h Use time: 1.5h Picture format: JPG Video format: MP4/AVI Support system: Android/IOS APP: Cleankit	0.3MP	White	237g/pc; 10.5kg/ CTN	21.8*9.6* 5.2	40pcs/CTN; 57*42*24.5
	0.3MP-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
H200		Pixel: 0.3 million Magnification: 20X Suction Power: 60-65kpa Clean gear: soft,normal,strong Material:ABS +PC 1 device with 6 replaceable tips Battery: 800mAh Charging time: 1.5h Use time: 1.5h Picture format: JPG Video format: MP4/AVI Support system: Android/IOS APP: Cleankit	0.3MP	Pink	282g/pc; 12.5kg/ CTN	21.8*9.6* 5.2	40pcs/CTN; 57*42*24.5

	2MP-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
H500		Pixel: 2MP Magnification: 20X Suction Power: 60-65kpa Clean gear: soft, normal, strong Material: ABS + PC 1 device with 2 replaceable suction heads Battery: 1300mAh/3h Charging time: 3.5h Picture format: JPG Video format: MP4/AVI Support system: Android/IOS APP: Cleankit	2MP	White	270g/pc; 11.5kg/ CTN	20.6*10.3* 4.7	40pcs/CTN; 54*40*23
	0.3MP-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
H600		Pixel: 0.3 million Magnification: 20X Suction Power: 60-65kpa Clean gear: soft, normal, strong Material: ABS + PC 1 device with 6 replaceable suction heads Battery: 800mAh Charging time: 1.5h Use time: 1.5h Picture format: JPG Video format: MP4/AVI Support system: Android/IOS APP: Cleankit	2MP	Pink/Black	270g/pc; 11.5kg/ CTN	20.6*10.3* 4.7	40pcs/CTN; 54*40*23

	2MP-WIFI-with customer logo	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
H300		Pixel: 2 million Magnification: 20X Suction Power: 60-65kpa Clean gear: soft,normal,strong Material:ABS +PC 1 device with 4 replaceable suction heads Battery: 1300 mAh Charging time: 3h Use time: 2h Picture format: JPG Video format: MP4/AVI Support system: Android/IOS Certification:CE/RoHS/FCC/ISO9001/FDA APP: Cleankit	2MP	White	260g/pc; 9kg/CTN	17*15.4*4.3	32pcs/CTN; 38.5*33*36

	5MP-WIFI	Specifications	Camera pixel	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
M3	 Visual Acne Cleaner	Pixel: 5MP Magnification: 20X Material:ABS +PC Battery: 240mAh/1h Focal length: 1.4-2cm Picture format: JPG Video format: MP4/AVI Support system: Android/IOS Certification:CE/RoHS/FCC/ISO9001/ FDA APP: Suear	5MP	Black/ Pink	79g/pc; 16.5kg/ CTN	17*6.6*1.8	200pcs/CTN; 49*34*27.5

Electric Spin Scrubber							
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
A10		Waterproof : IP65 Rated power: 30W Rated voltage: 3.1V-4.2V Torque: 7kg for high gear and 5.6kg for low gear Speed: High range 420R/MIN, low range 330R/MIN Noise decibel: 80CM distance<70DB Power supply mode: 5V/1A Battery capacity: 2500MA Charging port: TYPE-C Battery life: 80 minutes Charging time: 170 minutes	/	White+black / White+Gray	1238g/pc; 20kg/ CTN	44.5*17 *8	15pcs/CTN; 46*41*53

	2500mAh	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
A11		Waterproof grade: IP65 Rated power: 30W Rated voltage: 3.1V-4.2V Torque: 7.2kg for high gear and 5.8kg for low gear Speed: High gear 360R/MIN, low gear 280R/MIN Noise decibel: 80CM distance<70DB Power supply mode: 5V/1A Battery capacity: 2500MA Charging port: TYPE-C Battery life: 80 minutes Charging time: 170 minutes	/	White+ black/ White+ Gray	1260g/pc; 20kg/ CTN	44.5*17 *8	15pcs/CTN; 46*41*53
	5000mAh	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
A11		Waterproof grade: IP65 Rated power: 30W Rated voltage: 3.1V-4.2V Torque: 7kg for high gear and 5.6kg for low gear Speed: High gear 360R/MIN, low gear 280R/MIN Noise decibel: 80CM distance<70DB Power supply mode: 5V/2A Battery capacity: 5000MA Charging port: TYPE-C Battery life: 160 minutes Charging time: 120 minutes	/	White+ black/ White+ Gray	1260g/pc; 20kg/ CTN	44.5*17 *8	15pcs/CTN; 46*41*53

		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
A12		Waterproof grade: IP65 Rated power: 30W Rated voltage: 3.1V-4.2V Torque: 7.2kg for high gear and 5.8kg for low gear Speed: High gear 360R/MIN, low gear 280R/MIN Noise decibel: 80CM distance<70DB Power supply mode: 5V/1A Battery capacity: 2500MA Charging port: TYPE-C Battery life: 80 minutes Charging time:170 minutes	/	White+ black/ White+ Gray	1260g/pc; 20kg/ CTN	44.5*17 *8	15pcs/CTN; 46*41*53
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
A12		Waterproof grade: IP65 Rated power: 30W Rated voltage: 3.1V-4.2V Torque: 7kg for high gear and 5.6kg for low gear Speed: High gear 360R/MIN, low gear 280R/MIN Noise decibel: 80CM distance<70DB Power supply mode: 5V/2A Battery capacity: 5000MA Charging port: TYPE-C Battery life: 160 minutes Charging time: 120 minutes	/	White+ black/ White+ Gray	1260g/pc; 20kg/ CTN	44.5*17 *8	15pcs/CTN; 46*41*53

		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
A13		Waterproof grade: IP65 Rated power: 30W Rated voltage: 3.1V-4.2V Torque: 7.2kg high gear/5.8kg low gear Speed: High gear 360R/MIN, low gear 280R/MIN Noise decibel: 80CM distance<70DB Power supply mode: 5V/1A Battery capacity: 2500MA Charging port: TYPE-C Battery life: 80 minutes	/	White/ Black	1260g/pc; 20kg/ CTN	44.5*17 *8	15pcs/CTN; 46*41*53
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
A13		Waterproof grade: IP65 Rated power: 30W Rated voltage: 3.1V-4.2V Torque: 7kg high gear/5.6kg low gear Speed: High gear 360R/MIN, low gear 280R/MIN Noise decibel: 80CM distance<70DB Power supply mode: 5V/2A Battery capacity: 5000MA Charging port: TYPE-C Battery life: 160 minutes	/	White/ Black	1260g/pc; 20kg/ CTN	44.5*17 *8	15pcs/CTN; 46*41*53

		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
A14		Waterproof grade: IP65 Rated power: 30W Rated voltage: 3.1V-4.2V Torque: 7.2kg high gear/5.8kg low gear Speed: High gear 360R/MIN, low gear 280R/MIN Noise decibel: 80CM distance<70DB Power supply mode: 5V/1A Battery capacity: 2500MA Charging port: TYPE-C Battery life: 80 minutes	/	White/ Black	1260g/pc; 20kg/ CTN	44.5*17 *8	15pcs/CTN; 46*41*53
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
A14		Waterproof grade: IP65 Rated power: 30W Rated voltage: 3.1V-4.2V Torque: 7kg high gear/5.6kg low gear Speed: High gear 360R/MIN, low gear 280R/MIN Noise decibel: 80CM distance<70DB Power supply mode: 5V/2A Battery capacity: 5000MA Charging port: TYPE-C Battery life: 160 minutes	/	White/ Black	1260g/pc; 20kg/ CTN	44.5*17 *8	15pcs/CTN; 46*41*53

Smart Phone for Kids							
	Unicorn/Dinosaur/Crab Silicone Case	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
KP06		1. 2.4-inch IPS HD screen; 2.Camera: front and rear dual cameras 300,000 pixels; 3.Battery: 800mah polymer (30days); 4.Memory card: supports 32G, equipped with 512MB; 5.USB port: Type-C port; 6.Camera/video recorder/photo album/recording/music player/video player/stopwatch/flashlight/alarm clock/calendar/calculator/pedometer /game/story collection/drawing board/geographical knowledge/life schedule	/	Pink/ blue/ Purple	194g/pc; 21.5kg/ CTN	14.5*9*4	100pcs/CTN; 47.5*41.5*3 1

Smart Camera for Kids							
	No waterproof	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
KC06-B02 /KC04/KC05	  	1. Display size: 2.0 inches IPS screen; 2.Camera: front and rear dual cameras 300,000 pixels; 3. Function: photo, video, game 4. Battery capacity: 400mAh(3h) 5. Support memory card: 32G (not include)	/	Pink/ Green	170g/pc; 22kg/ CTN	7.4*5.2*12.8	120pcs/CTN; 57.5*28.5*48.5

	Waterproof	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
KC07		1. Display size: 2.0 inches IPS screen; 2. Camera: front and rear dual cameras 300,000 pixels; 3. Function: photo, video, game 4. Battery capacity: 400mAh(3h) 5. Support memory card: 32G (not include)	/	Pink/ blue/ Purple	442g/pc; 21kg/ CTN	12.3*7.1* 16.3	45pcs/CTN; 51*38.5*39

		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
D5	   	1. Display size: 2.4 inches IPS screen; 2. Camera: front and rear dual cameras 300,000 pixels; 3. Function: photo, video, game 4. Battery capacity: 1000mAh(3h) 5. Support memory card: 64G (not include)	/	Pink/ blue/ Purple	/	/	/

Electric Nasal Aspirator for Baby

	Electric Nasal Aspirator for Baby						
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
X50S		LED light shows 9 gears Music playback: support music playback Nozzle: supports 3 forms of food-grade nozzles Working noise: <60dB Atmosphere light: support Automatic cleaning function: support Material: Food grade silicone, ABS Washable tips Not waterproof Charging port: Type-C Charging voltage: 5V-1A Battery: 800mAh	/	White+ blue	380g/pc; 20.5kg/ CTN	21*12.8* 6.5	48pcs/CTN; 43.5*52.7* 41.5
	With water spray function	Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
X50A		LED light shows 9 gears Music playback: support music playback Nozzle: supports 3 forms of food-grade nozzles Working noise: <60dB Atmosphere light: support Automatic cleaning function: support Material: Food grade silicone, ABS Washable tips Not waterproof Charging port: Type-C Charging voltage: 5V-1A Battery: 800mAh	/	White+ Gray	/	/	/

	Baby monitor						
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
YE01		Lens Diameter: 12mm Focal Length: 2.0MM Field: (V): 60 ° (H): 100 ° (D) 125 ° Infrared Fill Light: 940LED*6 Photo and video resolution: 1080P Operating Temperature: 14°F~112 °F Camera Temperature: 5°F~167°F Cable Length: 6M Body*1/Cable holder*20/Straps*2/ Ties*5/Charging Adapter*1/ Type-C Adapter*1 /User manual*1 APP: Sup-Anesok	/	Black	265g/pc; 17kg/ CTN	15.5*14.5*6 cm	60pcs/CTN; 60*48*32
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
YE03		Lens Diameter: 12mm Focal Length: 2.0MM Field: (V): 60 ° (H): 100 ° (D) 125 ° Infrared Fill Light: 940LED*6 Photo and video resolution: 1080P Operating Temperature: 14°F~112 °F Camera Temperature: 5°F~167°F Cable Length: 6M Body*1/Cable holder*20/Straps*2/ Ties*5/Charging Adapter*1/ Type-C Adapter*1 /User manual*1 APP: Sup-Anesok	/	Black	280g/pc; 18kg/ CTN	15.5*14.5*6 cm	60pcs/CTN; 60*48*32

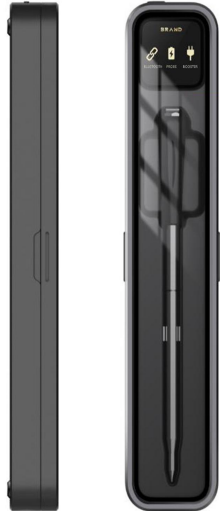
Star Projector							
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
GP06		Northern Lights + Stars Bluetooth audio, subwoofer speaker White noise 15 songs Infrared remote control 5 meters away from timed shutdown Cool APP control and scene setting CE-RED/Rosh/FCC-ID/FDA/PSE Product + base 5V/2A charging cable Remote control Manual Anti-collision sponge Color box	/	White	712g/pc; 21kg/ CTN	18*17* 15	27pcs/CTN; 54*48*58
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
GP08		Northern Lights + Stars Bluetooth audio, subwoofer speaker White noise 15 songs Infrared remote control 5 meters away from timed shutdown Cool APP control and scene setting CE-RED/Rosh/FCC-ID/FDA/PSE Product + base 5V/2A charging cable Remote control Manual Anti-collision sponge Color box	/	White	712g/pc; 21kg/ CTN	18*17* 15	27pcs/CTN; 54*48*58

	Electric Nail Drill						
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
FB08		3.2-5.0V Rotation speed:0-15000.RPM Charging port:Type-C	/	Pink / Gold	118g/pc; 13kg/ CTN	160*54*40	98pcs/CTN; 40.3*33.5* 30.8

		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
FB07		Input voltage: 5V/1A Working voltage:3.7V Rotation speed:0-15000.RPM Battery capacity:500mAh Charging port:Type-C Charging time:1.5H Working time:2-5H Nail drill handpiece *1 Storage base + Drill bit *9 Dust cover *1 Sanding band *1 Charging cable *1	/	Pink / Gold	310g/pc; 21kg/ CTN	20.3*9.4* 7.1	60pcs/CTN; 42.1*48.5* 45.1
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
FB09		Input voltage: 5V/1A Working voltage:3.7V Rotation speed:0-15000.RPM Battery capacity:500mAh Charging port:Type-C Charging time:1.5H Working time:2-5H Nail drill handpiece *1 Storage base + Drill bit *9 Dust cover *1 Sanding band *1 Charging cable *1	/	Pink / Gold	/	20.3*9.4* 7.1	60pcs/CTN; 42.1*48.5* 45.1

	Skin Scrubber						
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
SS06		Working voltage: 4.2~3.3 Working current: 500mA Blade Frequency: 24kHz~27kHz Battery capacity: 500mah(5hours) Material: Stainless steel/PC/ABS	/	White	129g/pc; 20kg/ CTN	19*7* 3.4	144pcs/CTN; 56.5*56*20

Eye Massager							
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
E13 ACE		Material: Plastic Product size: 209X116x 94mm Buttons: 4 independent control physical buttons Charging port: Type-C Charging voltage: 5V-1A Battery: 1500mAh Control chip: version 5.0 Horn: Double D18 horn Airbags: 4+6 double airbags Air pressure: 70KPa Heating: support Vibration: support Mode: 4 fixed + user adjustable Certification: FCC-ID	/	White/ Black	600g/pc; 21kg/ CTN	20.8*13.2*10.2	32pcs/CTN; 54.5*43*43

Wireless Meat Thermometer							
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
M6		Material: temperature needle 304 stainless steel Charging port: Type-C Charging voltage: 5V-1A Battery: 800mAh/36H Control chip: Bluetooth 5.0 version Bluetooth connection transmission distance: Max-100M Information prompt: LED light display APP: support Waterproof: Pin IP67 Food temperature -20-100 ° C, Environmental temperature 0-300 ° C Food thermometer detection error:±1°C Read temperature time: 1S Certification: FCC-ID, FDA	/	Black	265g/pc; 21kg/ CTN	23.5*6.5* 5.2	72pcs/CTN; 48.5*40.5* 33.7

Air Duster							
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
CF99		Rated Power:60W Battery: 6000mah First gear 28000 rpm, wind power 35g, service time 58 minutes Second gear 34000 rpm, wind power 55g, service time 28 minutes Charging Time:2.5H Working Temperature: 14°F~122°F(-10°C~50°C); Noise:<90dB Material:ABS,PP Electric Air Duster*1 USB Cable*1 Nozzle*6 Use Manual*1	/	Black	453g/pc; 15kg/ CTN	17.5*16* 6.2	32pcs/CTN; 50*39*34.5

Hydroponics Growing System							
		Specifications	/	Color	G.W(G)	Box Size(CM)	Pcs / Master CTN/CTN Size (CM)
GS310		Material: Plastic Product size: 429x188x150mm Button: full touch function button Charger: Comes with charging head DC port Input voltage: 100-240V Working voltage: 24V-1A Control chip: single chip microcomputer Water tank capacity: 4.5 liters Planting space: 13pcs Planting area: 751cm Planting height: 445mm/17.5Inch Working noise: <40dB Certification: whole machine FCC-SDOC, nutrient solution SDS, charger UTL	/	White	2300g/pc; 16kg/ CTN	45*21.8* 18	6pcs/CTN; 46.8*45.4*5 6

Shenzhen Yipincheng Technology Co., Ltd. is one 10years professional endoscope camera supplier in Shenzhen, China. Our Associated factory is located in Dongguan, very close to Shenzhen. We produce the standard endoscope, microscope, ear cleaner, oral camera, water flosser, blackhead remover products. We have our own brands: Inskam, SUNUO, ANESOK. We currently have more than 400 employees, high efficiency sales team, 30 R&D professional engineers, 6500 square meters workshop, 6 professional production lines to ensure product quality with advanced production technology and management. We are equipped with strong technical support and enable us to receive OEM, ODM projects. We can produce at least 20,000pcs products per day. All our products are passed the CE, FCC, RoHS, FDA, ISO9001, ISO13485, BSCI testing, these products are 100 % fully load burn-in testing to make sure the quality. We are reliable supplier of the endoscope supply with 1 year warranty. After 10 years' development, We have achieved great progress, our competitive price superiority and good quality attract customers from all over the world, we export to over 100 countries, including USA, Canada, Poland, Denmark, Germany, Russia, Mexico, Brazil, India, South Korea and Japan. Today, Yipincheng Group has proven itself to be revolutionizing the field of endoscope camera and continues to help people all around the world see better with us. We are looking

Our Company



Our Factory



Our Workshop



Our Certificates

Certificates



